





International Space Station Capabilities and Payload Accommodations

Rod Jones, Manager, ISS Payloads Office

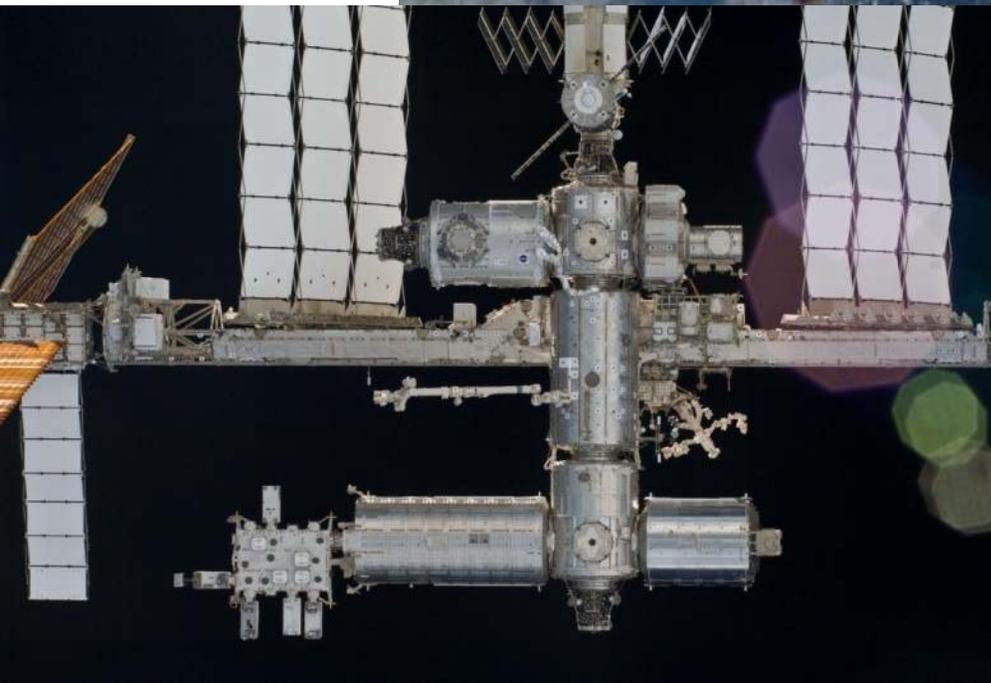

Current Stage

International Space Station Facts

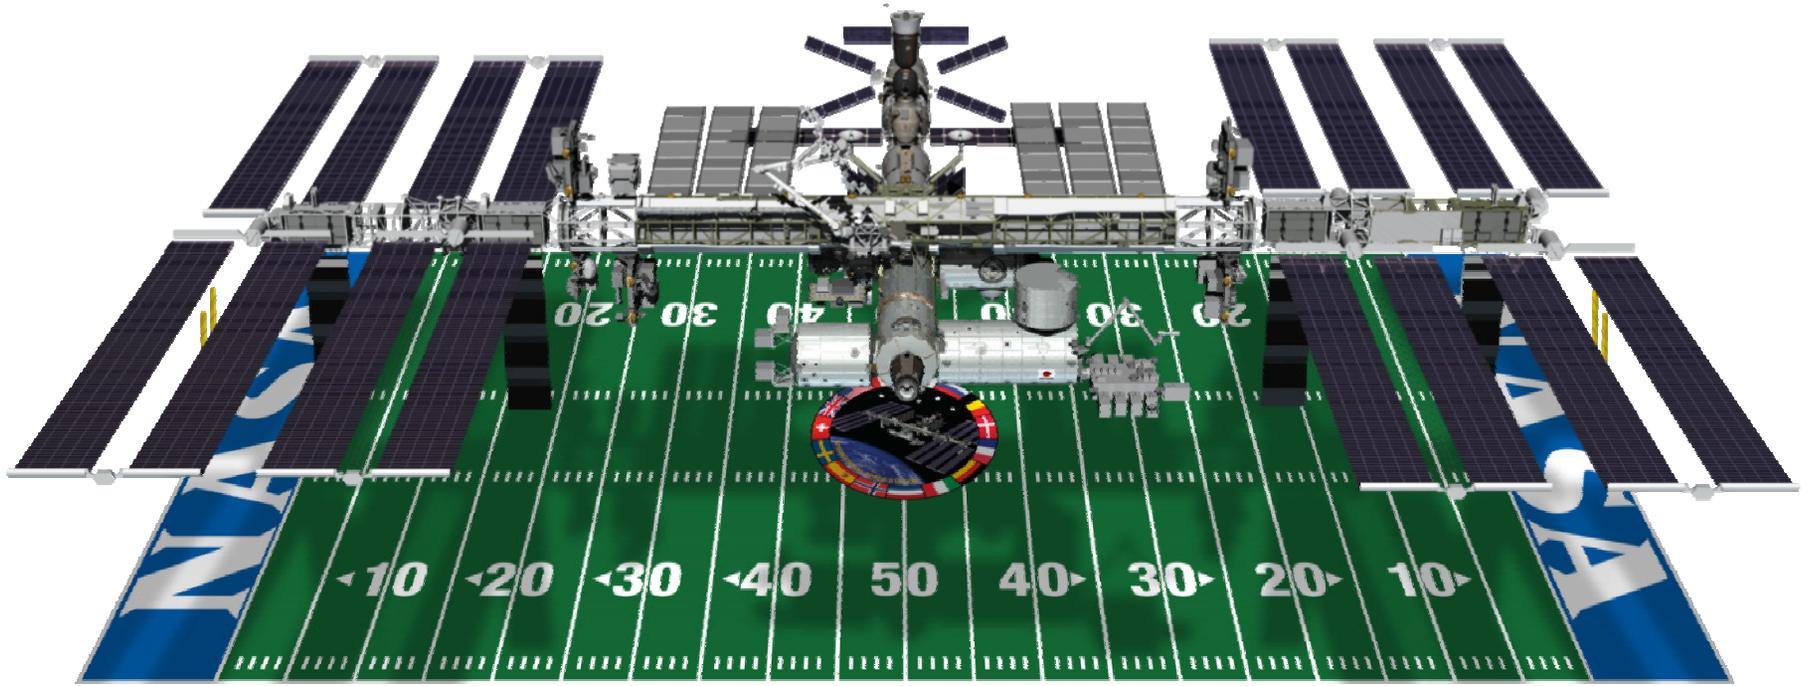

Spacecraft Mass: 799,046 lb (362,441 kg)


Velocity: 17,500 mph (28,200 kph)

Altitude: 220 miles above Earth

Power: 80 kW continuous

**Science Capability: Laboratories from four international space agencies –
US, Europe, Japan, and Russia**

Assembly Complete Configuration

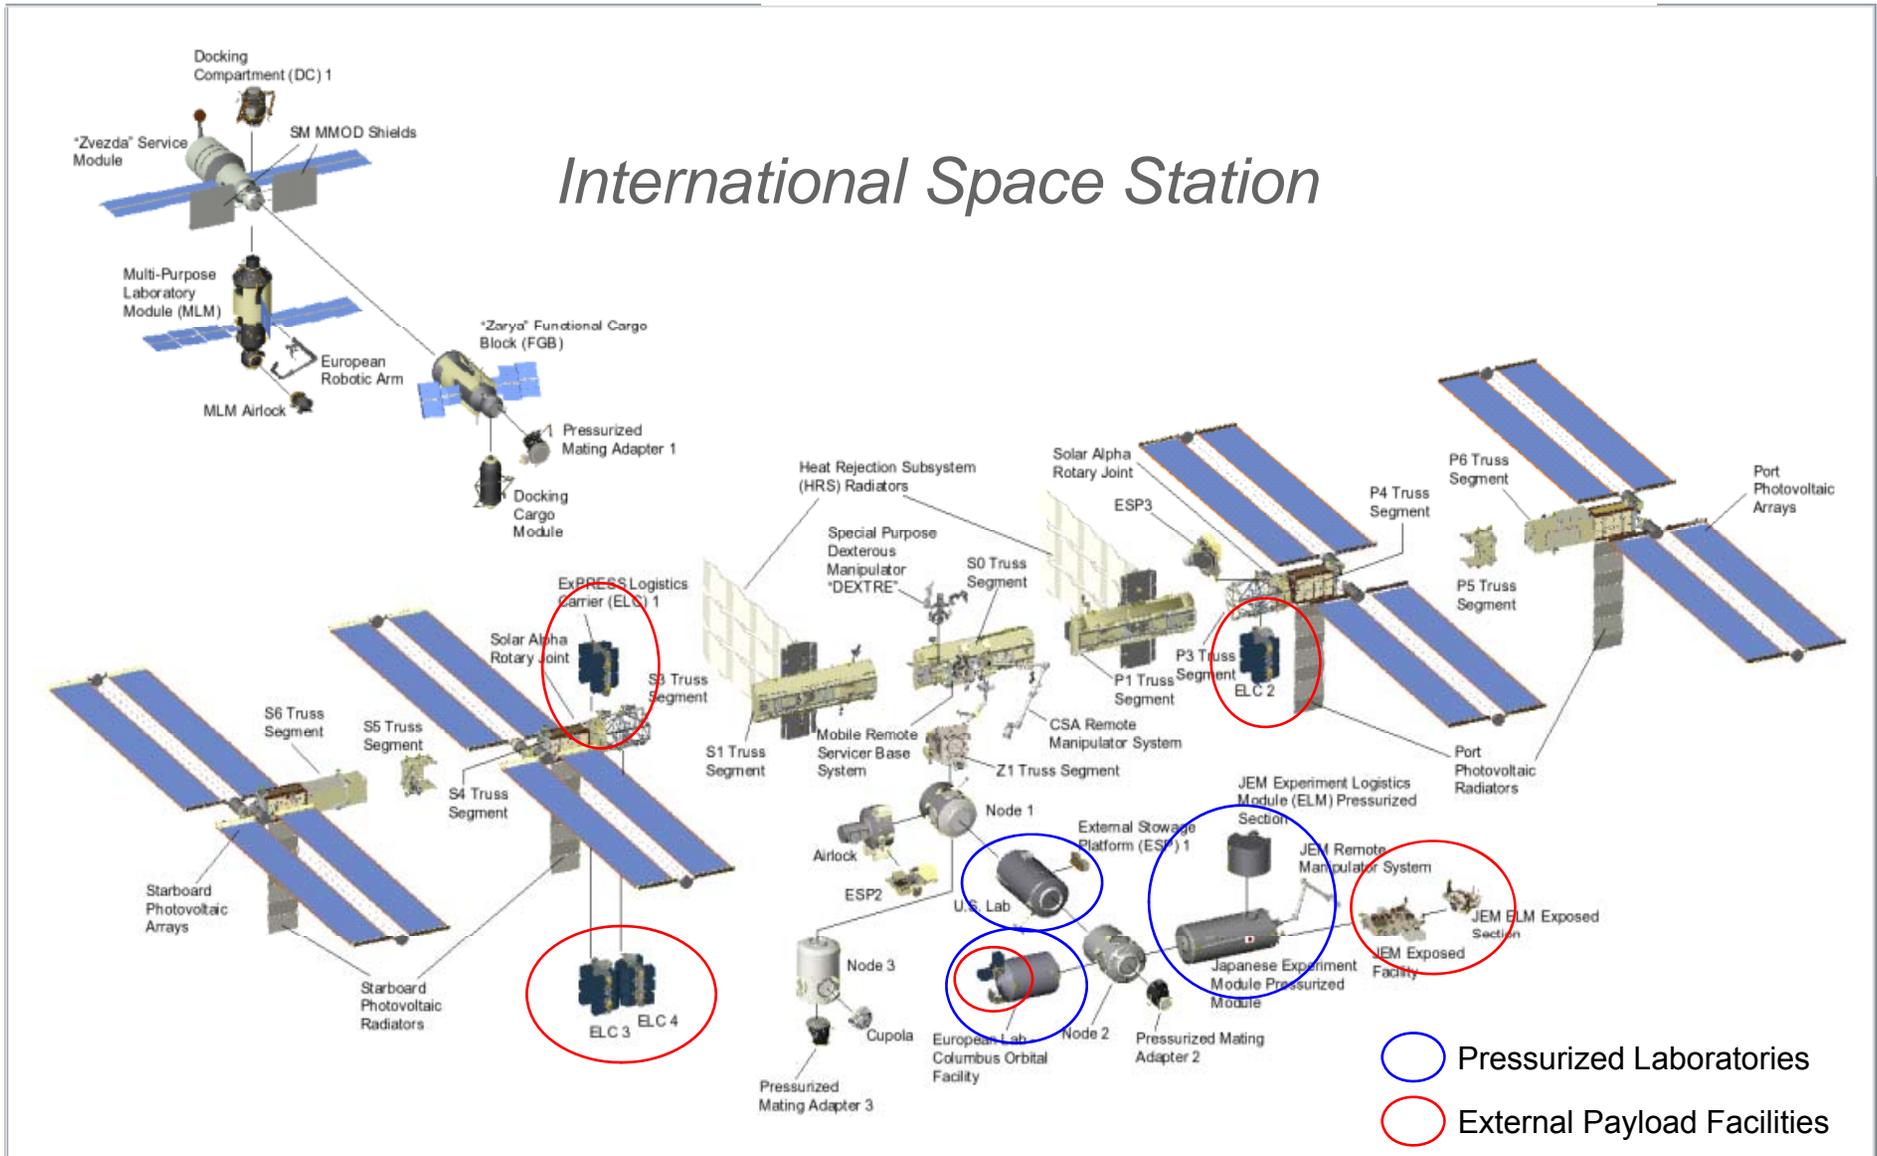


The Microgravity Environment


The ISS is equipped with an array of sensors that monitor perturbations to the microgravity state on-orbit.

Even without the Active Rack Isolation System, vibrations are typically within ISS requirements.

SAMS F03 Max1/3 Octave Band T2-10-10-2009

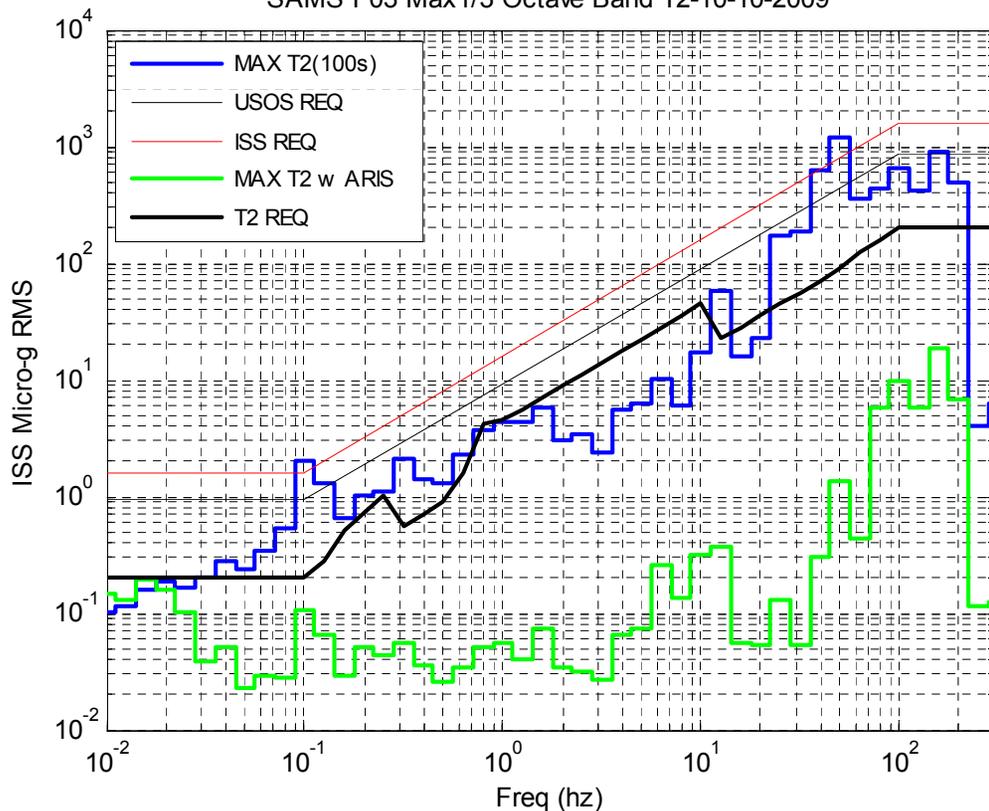


Median 1/3 Octave Band test Period

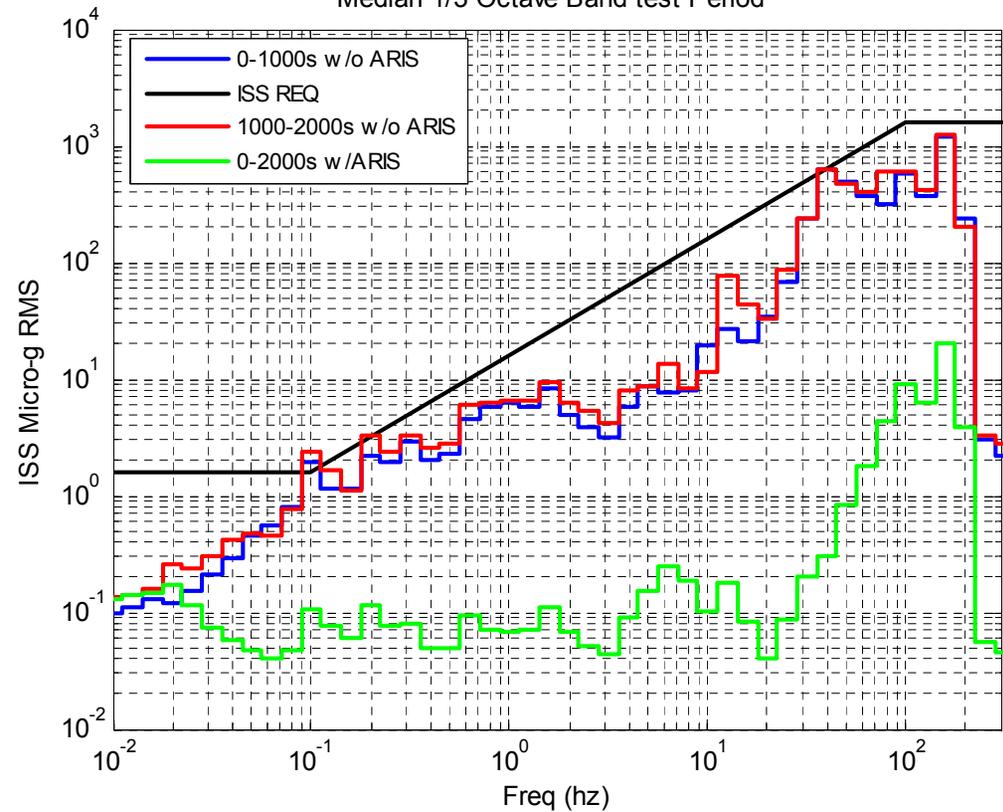

While the Station is at its most “quiet” during the eight hours of crew sleep, the Active Rack Isolation System can be effective even during crew exercise.

Earth Observation

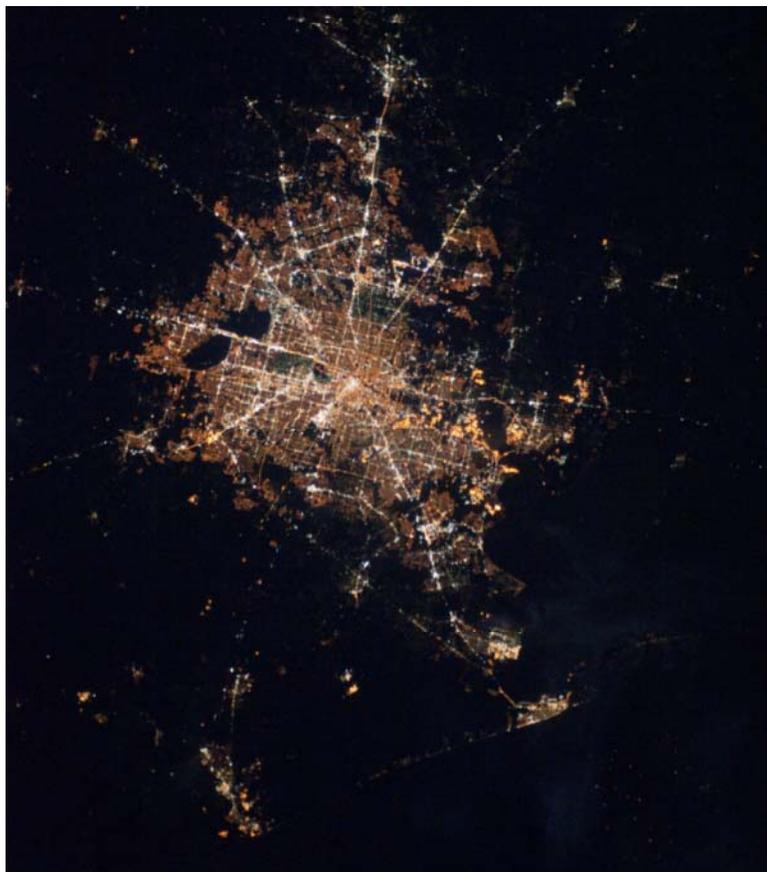

*Houston at Night
Expedition 22*



*Artificial islands of Dubai
Expedition 22*



*Soufriere Hills volcano
Expedition 21*

The ISS provides coverage of 85% of the Earth's surface and 95% of the world's populated landmass every 1-3 days, depending on orbital track and field-of-view.

Our Windows on the Earth



US Laboratory Window

50-cm diameter

Telescope-quality optical glass



Service Module Window

40-cm diameter



The Cupola

80-cm diameter

(top window)

ON Orbit Resources Provided to Payloads


Power	30kw average
Air to Ground Data	~37.5 Mbps of video (3 lines of video at 12.5 Mbps each)
	~8 Mbps of MRDL data (Science return)
	~5 Mbps for payload still imagery downlink
	~20 Mbps utilized for payload data recorded over LOS
Internal Racks	13 U.S. Lab
	5 ESA Lab
	6 JAXA Lab
External Sites	8 Truss ELC Platform Sites
	5 JAXA Platform Sites
	2 ESA Platform Sites
Crewtime	35 hrs per week (average)

Upgrades In Work




Enhanced Processor and Integrated Communications (EPIC) Project	Phase A will upgrade the three Command and Control (C&C) MDMs and the two Guidance, Navigation, & Control (GN&C) MDMs.
	Phase B will upgrade the two Payload MDMs, and add Ethernet support for the C&C and Payload MDMs.
Air to Ground High Rate Communications System (HRCS) Project	Increase data rates internally and on the RF link (300 Mbps downlink, 7/25 Mbps uplink)
	Combine audio and video on orbit
	Provide two way, high quality audio
	Open the door to internet protocol communications
	Open the forward link to multiple users
	Allow for the capability of transmitting & recording HDTV
On Orbit External Wireless High Rate	100 Mbps 2-way Ethernet capability
	1 Mbps 1553 capability
	Up to 4 antennas attached to EVA handrails on US Lab

What space is available for research?

Science Rack Topology

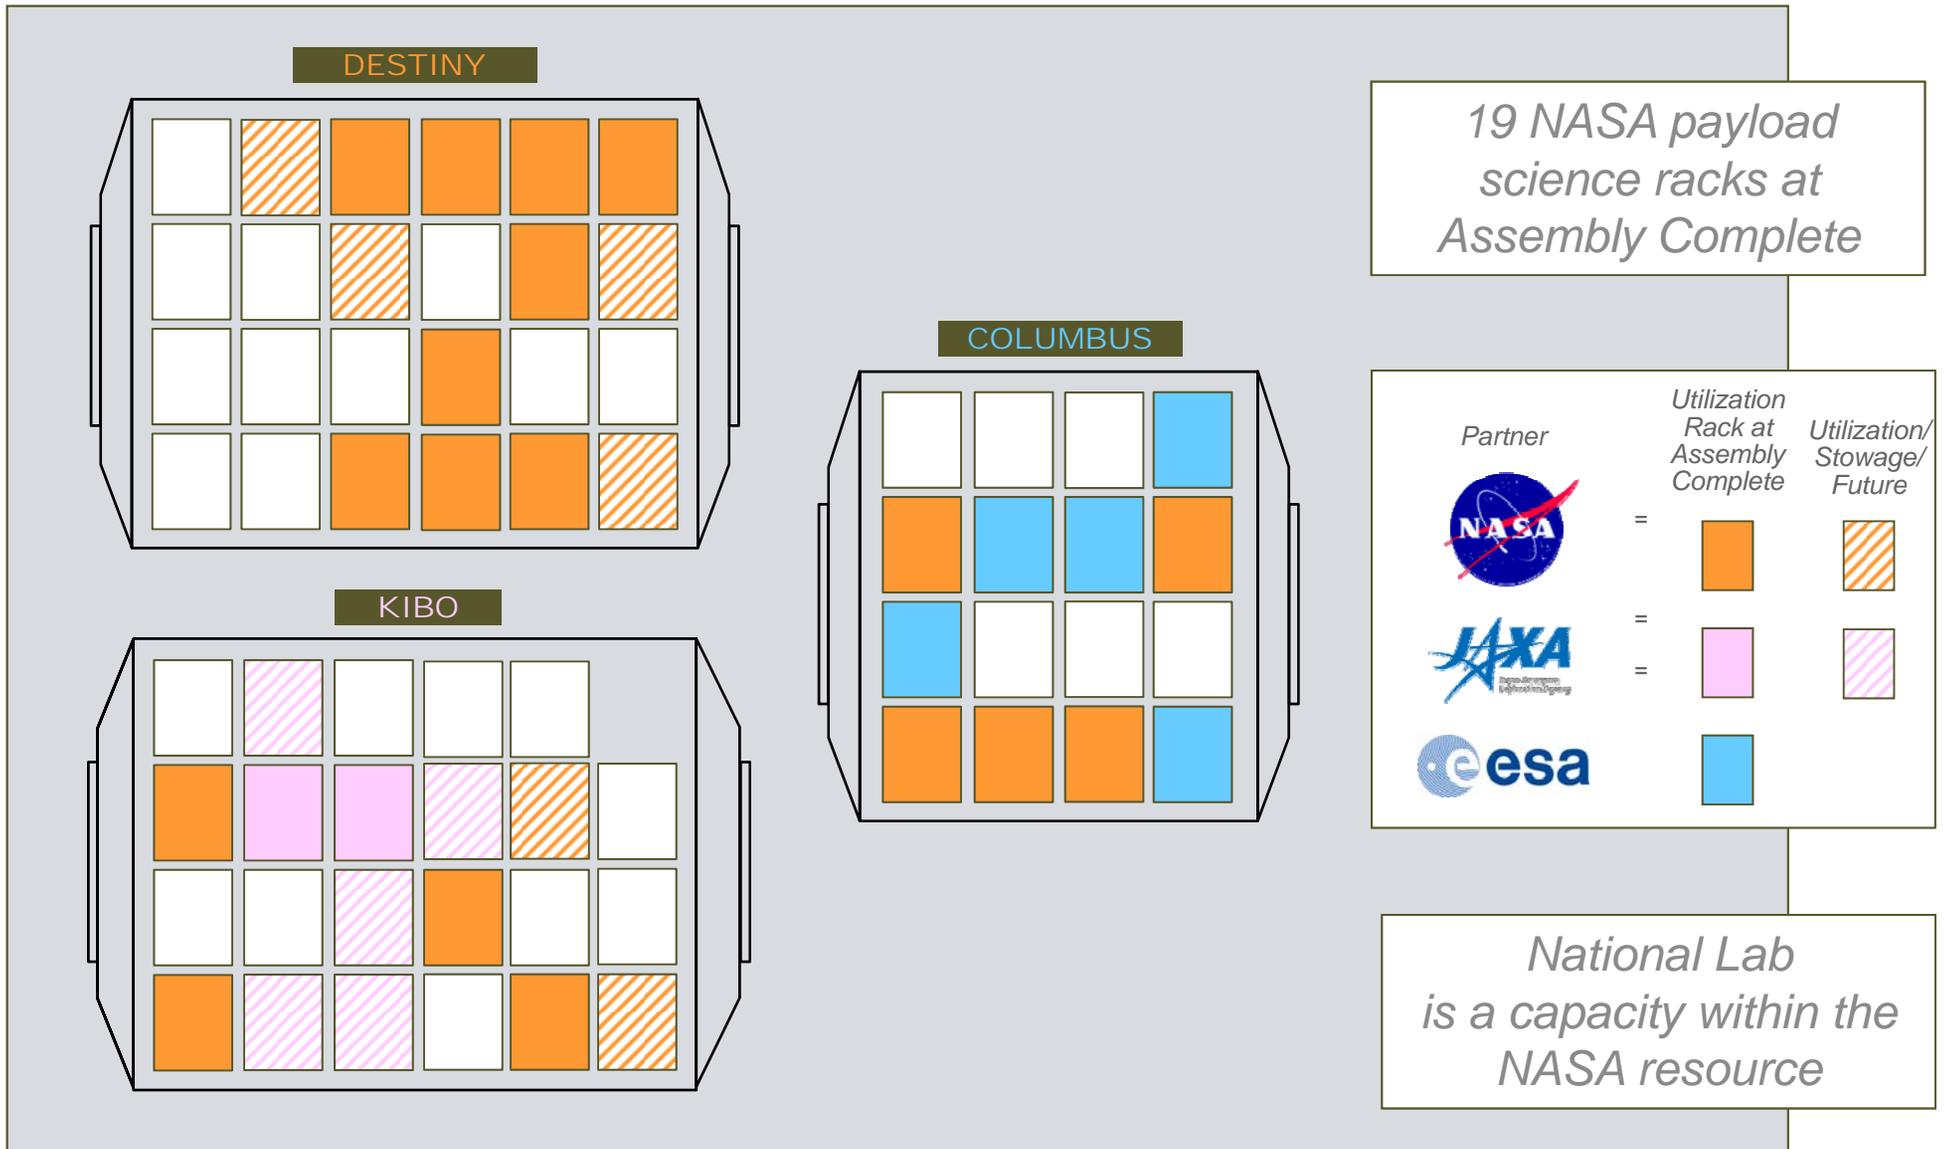

NASA Science Rack Facilities
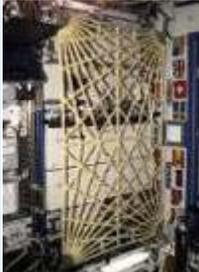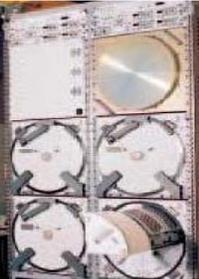
<p>2 Human Research Facility</p> 	<p>6 EXPRESS Racks ER1 ER2A</p>  		<p>MELFI and MELFI-2</p> 	<p>ER6 (Galley and Research)</p> 	<p>Combustion Integrated Rack</p> 	<p>EXPRESS-8</p> 
	<p>ER3A</p> 	<p>ER4</p> 	<p>Euro. Modular Cultivation System (EMCS) In ER3A (July 2006)</p> 	<p>Window Observational Research Facility</p> 	<p>Fluids Integrated Rack</p> 	<p>MELFI-3</p> 
<p>Microgravity Sciences GloveBox</p> 	<p>ER5</p> 	<p>ER7</p> 	<p>SpaceDRUMS In EXPRESS 5</p> 		<p>Materials Science Research Rack</p> 	<p>Muscle Atrophy Research Exercise System (MARES)</p> 

On-Orbit

ULF-5

More detailed information available at <http://www.nasa.gov/iss-science/> Click on "Facilities Catalog"

Station to Internal Rack Resources


Power	3, 6, or 12 kW, 114.5 - 126 voltage, direct current (VDC)	
Data	Low Rate	MIL-STD-1553 bus 1 Mbps
	High Rate	100 Mbps
	Ethernet	10 Mbps
	Video	NTSC
Gases	Nitrogen	Flow= 0.1 kg/min minimum; 517-827 kPa, nominal; 1,379 kPa, maximum
	Argon, carbon dioxide, helium	517-768 kPa, nominal; 1,379 kPa, maximum
Cooling Loops	Moderate temperature	16.1°C – 18.3°C
	Flow rate	0 - 45.36 kg/h
	Low temperature	3.3°C – 5.6°C
	Flow rate	233 kg/h
Vacuum	Venting	10 ⁻³ torr in less than 2 h for single payload of 100 L
	Vacuum resource	10 ⁻³ torr

ExPRESS Rack Accommodations

(Expedite the Processing of Experiments for Space Station)



Peggy Whitson works the Advanced Astroculture (ADVASC) plant growth chamber during Expedition 5 in July 2005

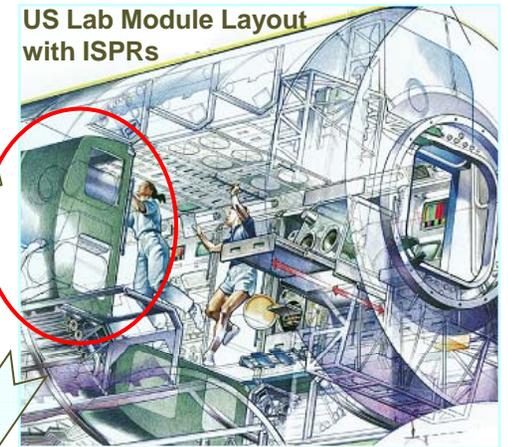

Middeck Locker
P/N V502-661604

Features

- 4 rear captive fastener attachments
- Friction hinge
- Dual door locks
- Installation tool guides on 4 corners
- Weight – 12 lbs

EXPRESS 8/2 Configuration

International Standard Payload Rack

Secondary Structure & Subsystems

8/2 Payload Configuration (8 Middeck Lockers, 2 Powered ISIS Drawers)

International Subrack Interface Standard Drawer
Powered P/N 683-43650
Stowage P/N 683-43656

Features

- 4 PU (Panel Unit)
- Blind Connectors
- Locking Handles
- Weight – 27 lbs
- Rated to at least 37 lbs




ExPRESS Rack Resources


(Expedite the Processing of Experiments for Space Station)

System	Middeck Locker Locations	ISIS Drawer Locations	Rack-Level Accommodation
Structural	72 lbs. within cg constraints	64 lbs. within cg constraints	8 Mid deck Lockers 2 ISIS Drawers (4 Panel Unit)
Power	28 Vdc, 0 – 500 W	28 Vdc, 0 – 500 W	2000 Watts 28Vdc power
Air Cooling	≤ 200 Watts	<100 Watts	1200 Watts
Thermal Control System Water Cooling	500 Watts (2 positions per rack)	500 Watts (2 positions per rack)	2 positions per rack
Command and Data Handling	RS422 Analog Ethernet 5 Vdc Discrete	RS422 Analog Ethernet 5 Vdc Discrete	RS422 Analog Ethernet 5 Vdc Discrete
Video	NTSC/RS170A	NTSC/RS170A	NTSC/RS170A
Vacuum Exhaust System	1 payload interface per rack	1 payload interface per rack	1 payload interface per rack
Nitrogen	1 payload interface per rack	1 payload interface per rack	1 payload interface per rack

Cold Storage Accommodations

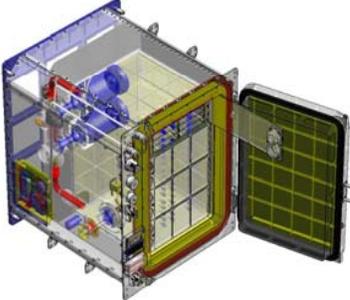
	MELFI	MERLIN	GLACIER	Single and Double Coldbag with ICEPAC's
				
First flight	2006	2007	2008	2006
On-orbit stowage	Yes	Possible	Possible	No
Transport	No	Yes	Yes	Yes
Power	Yes	Yes	Yes	No
On-orbit temperature (°C)	+4, -26, -80	+45 to -20	+4 to -185	N/A
Transport temperature (°C)	N/A	+45 to -5	+4 to -160	+4 to -32
Useable volume (L)	175	19	30	6.8/18.7
External volume	1 rack	1 MLE	2 MLE	0.5/1 MLE

Truss Attach Site Usage

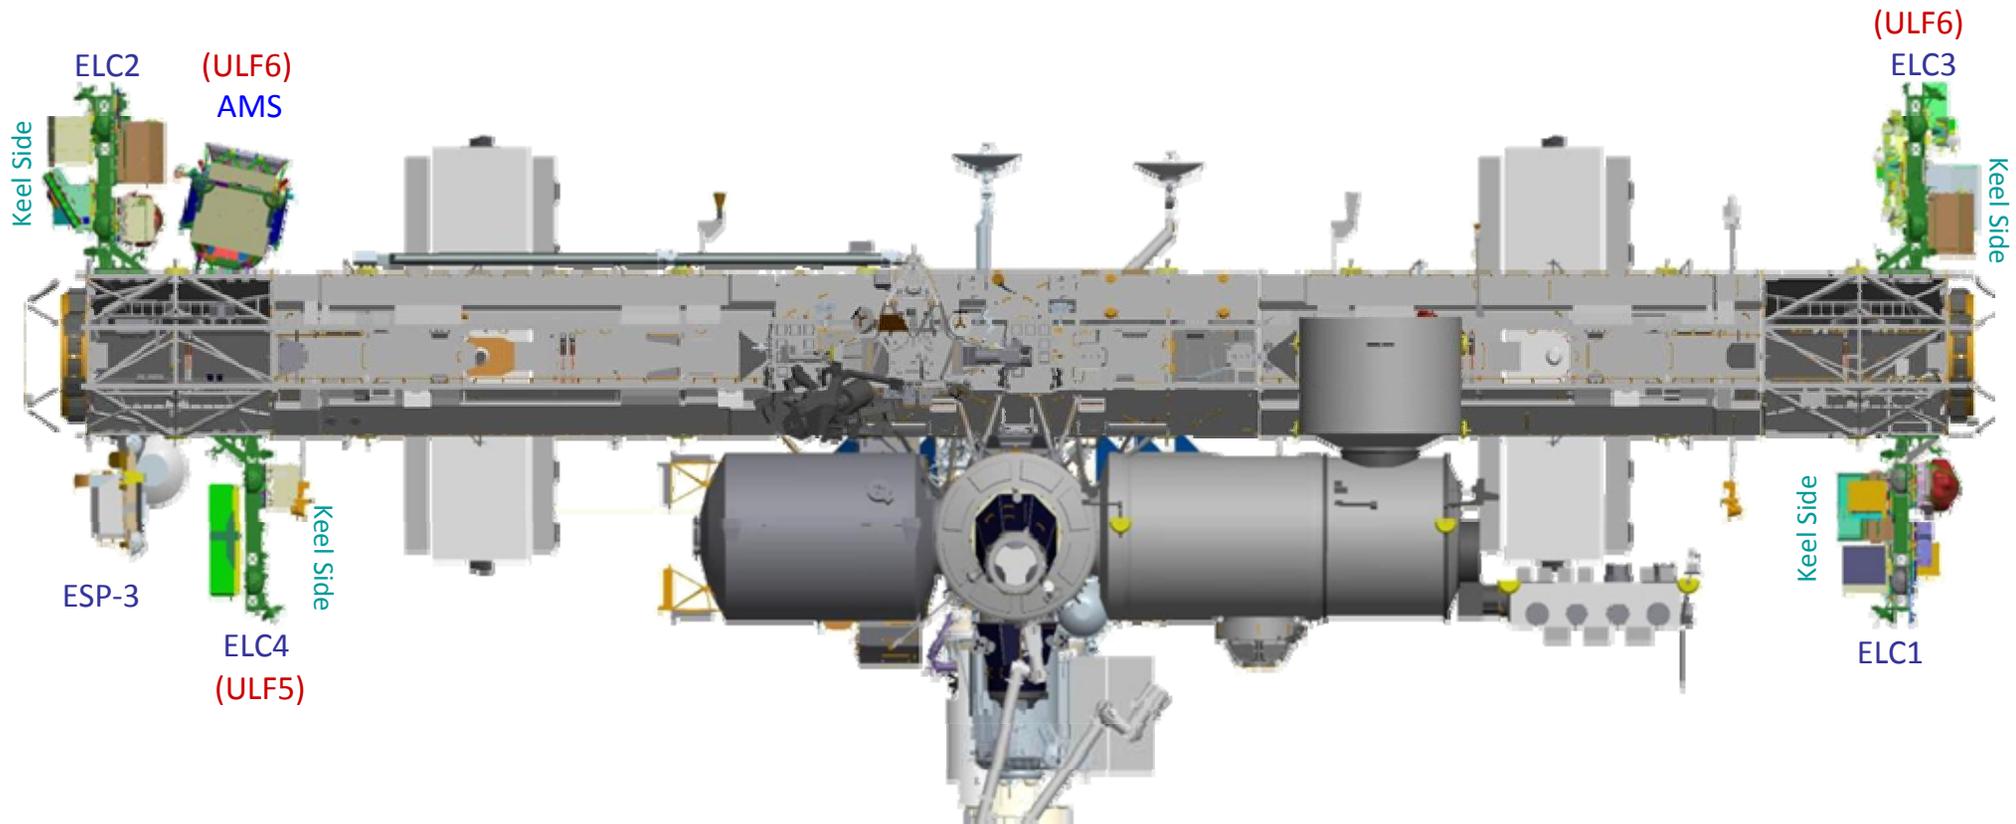

External Research Accommodations

Common Attachment System (CAS) Site

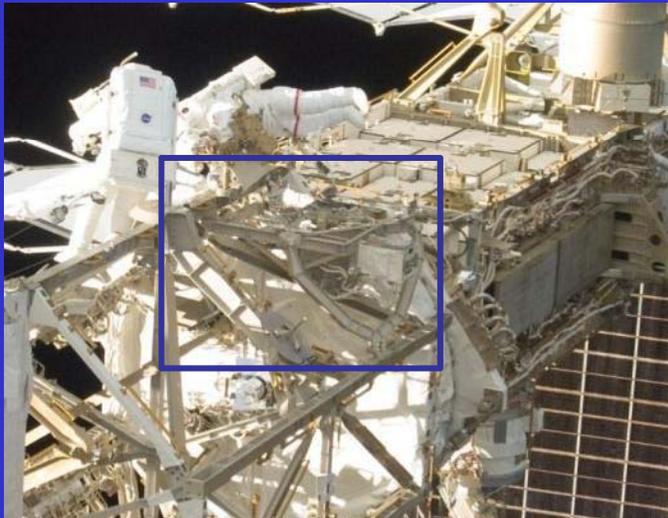


Mass capacity	1360 - 8618 kg (3000 - 19000 lb)
Power	3 kW each on two lines (primary, auxiliary)
Thermal	Passive
Low-rate data	1 Mbps (MIL-STD-1553)
High-rate data	100 Mbps (shared)
Sites available to NASA	6 sites

Recent ISS Assembly Science Facilities


NASA Express Logistics Carriers (ELCs)

S3 Truss

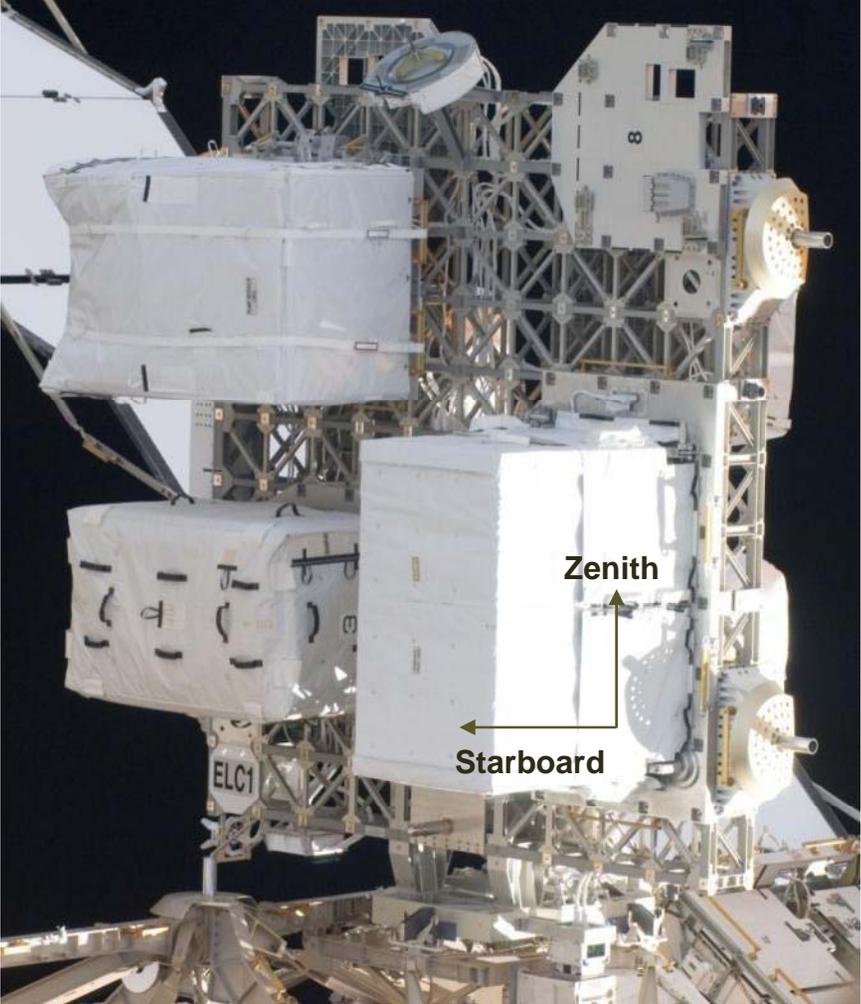

ELC1, ELC3, & ELC4

P3 Truss

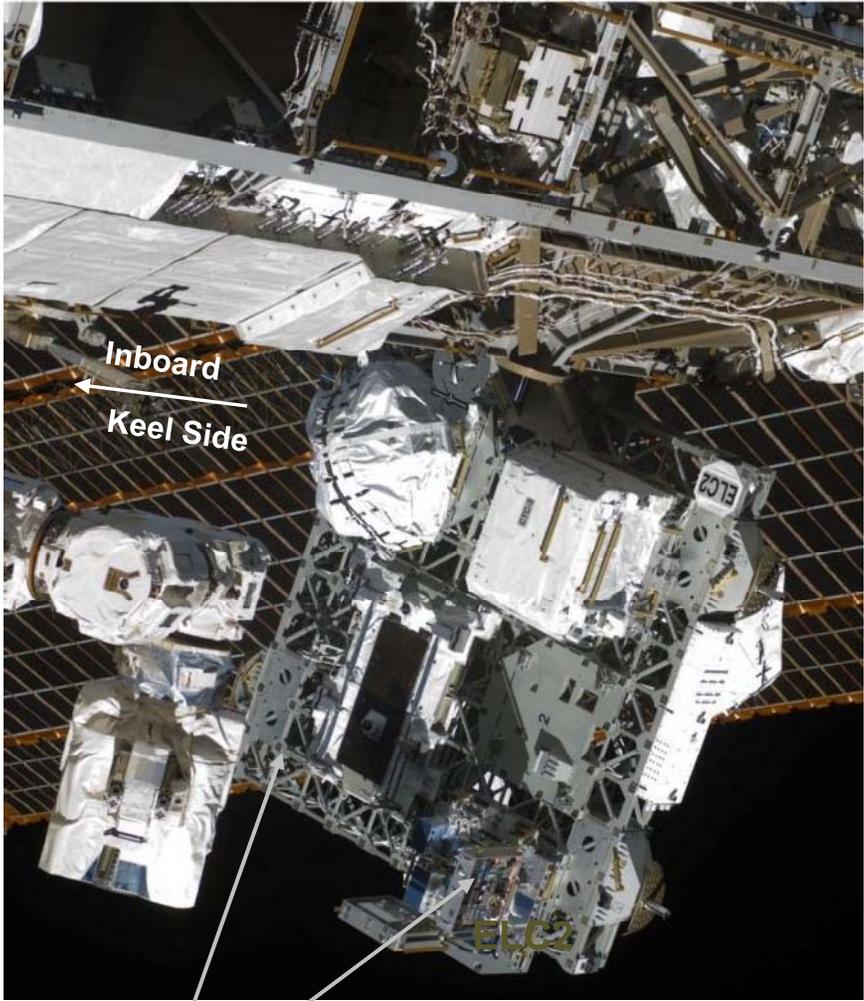


ELC2

2 payload sites per ELC

External Research Accommodations

ELC Single Adapter Resources

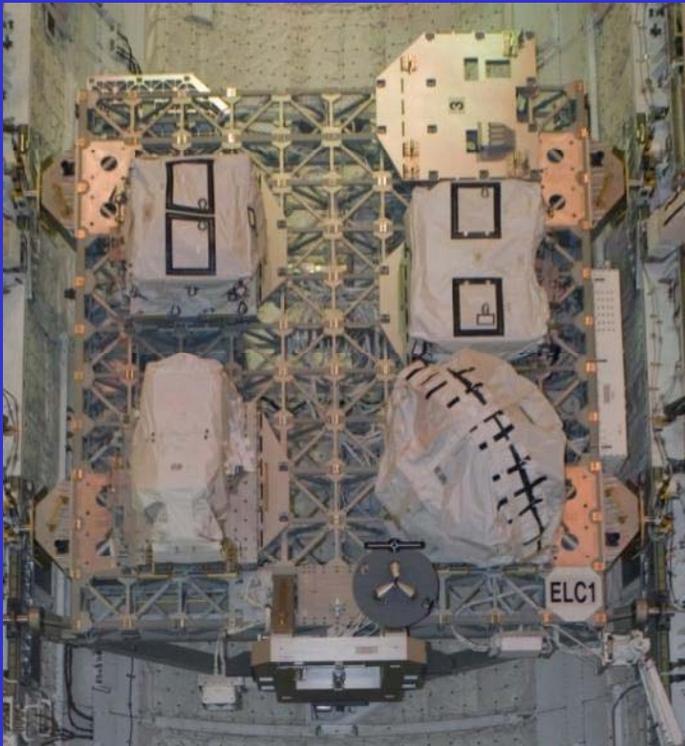

Mass capacity

227 kg (500 lb)

Volume

1 m³

Power

**750 W, 113 – 126 VDC;
500 W at 28 VDC per
adapter**

Thermal

**Active heating, passive
cooling**

Low-rate data

1 Mbps (MIL-STD-1553)

Medium-rate data

6 Mbps (shared)

Sites available per ELC


2 sites

Total ELC sites available

8 sites

Recent ISS Assembly Science Facilities


Japanese Experiment Module - Kibo

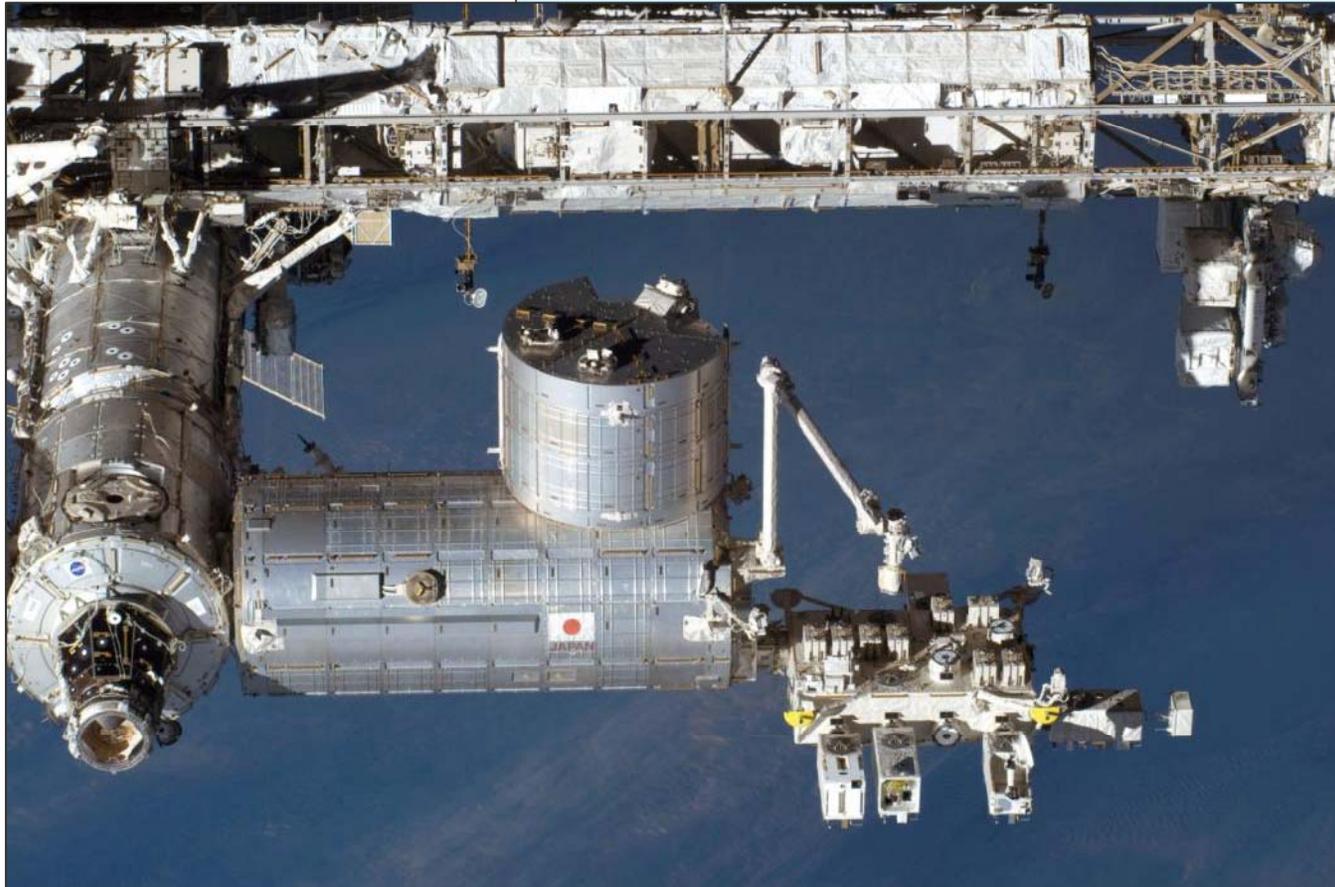

- *5 external payload sites allocated to NASA on the JEM Exposed Facility*
- *6 internal active payload rack locations allocated to NASA inside the JEM Pressurized Module*

External Research Accommodations

JEM-EF Resources

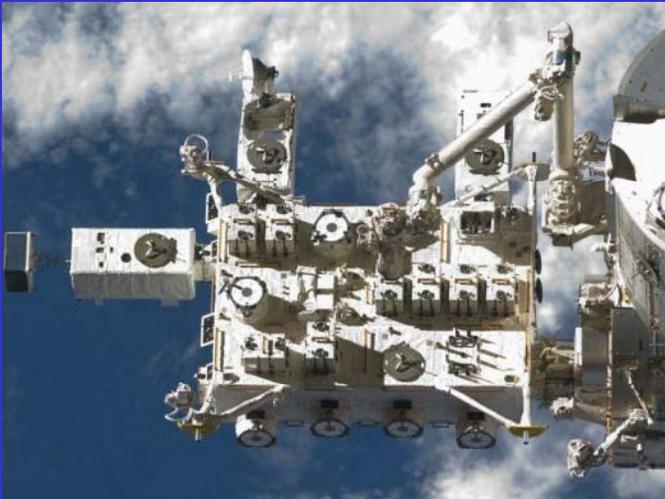

Mass capacity	550 kg (1,150 lb) at standard site 2,250 kg (5,550 lb) at large site
Volume	1.5 m ³
Power	3-6 kW, 113 – 126 VDC
Thermal	3-6 kW cooling
Low-rate data	1 Mbps (MIL-STD-1553)
High-rate data	43 Mbps (shared)
Sites available to NASA	5 sites


External Research Accommodations

Columbus External Resources



Mass capacity	230 kg (500 lb)
Volume	1 m³
Power	2.5 kW total to carrier (shared)
Thermal	Passive
Low-rate data	1 Mbps (MIL-STD-1553)
Medium-rate data	2 Mbps (shared)
Sites available to NASA	2 sites

ISS Visiting Vehicles Post-Shuttle

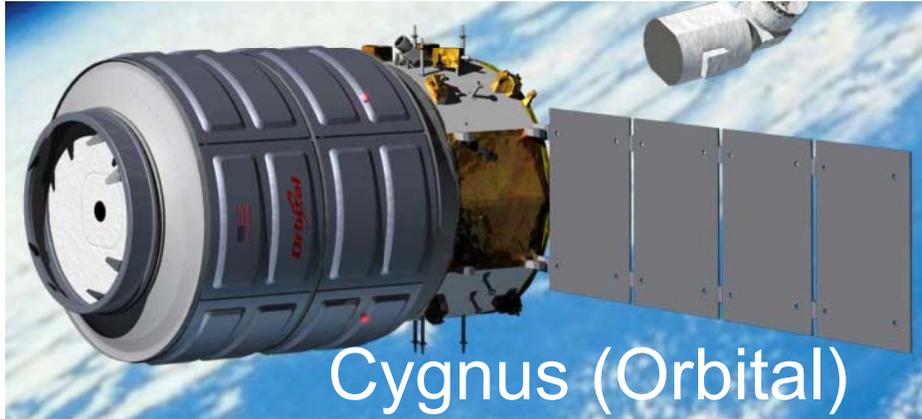

Progress/Soyuz (Energia)



HTV (JAXA)






For current baseline refer to
SSP 54100 IDR Flight Program

Flight Program Working Group (FPWG)

Crew Rotation and Port Utilization Graphic – For Reference Only

NASA Official: Sean Fuller
Prepared by: Scott Paul
Chart Updated: April 6th, 2010
SSCN/CR: 12192 Baseline

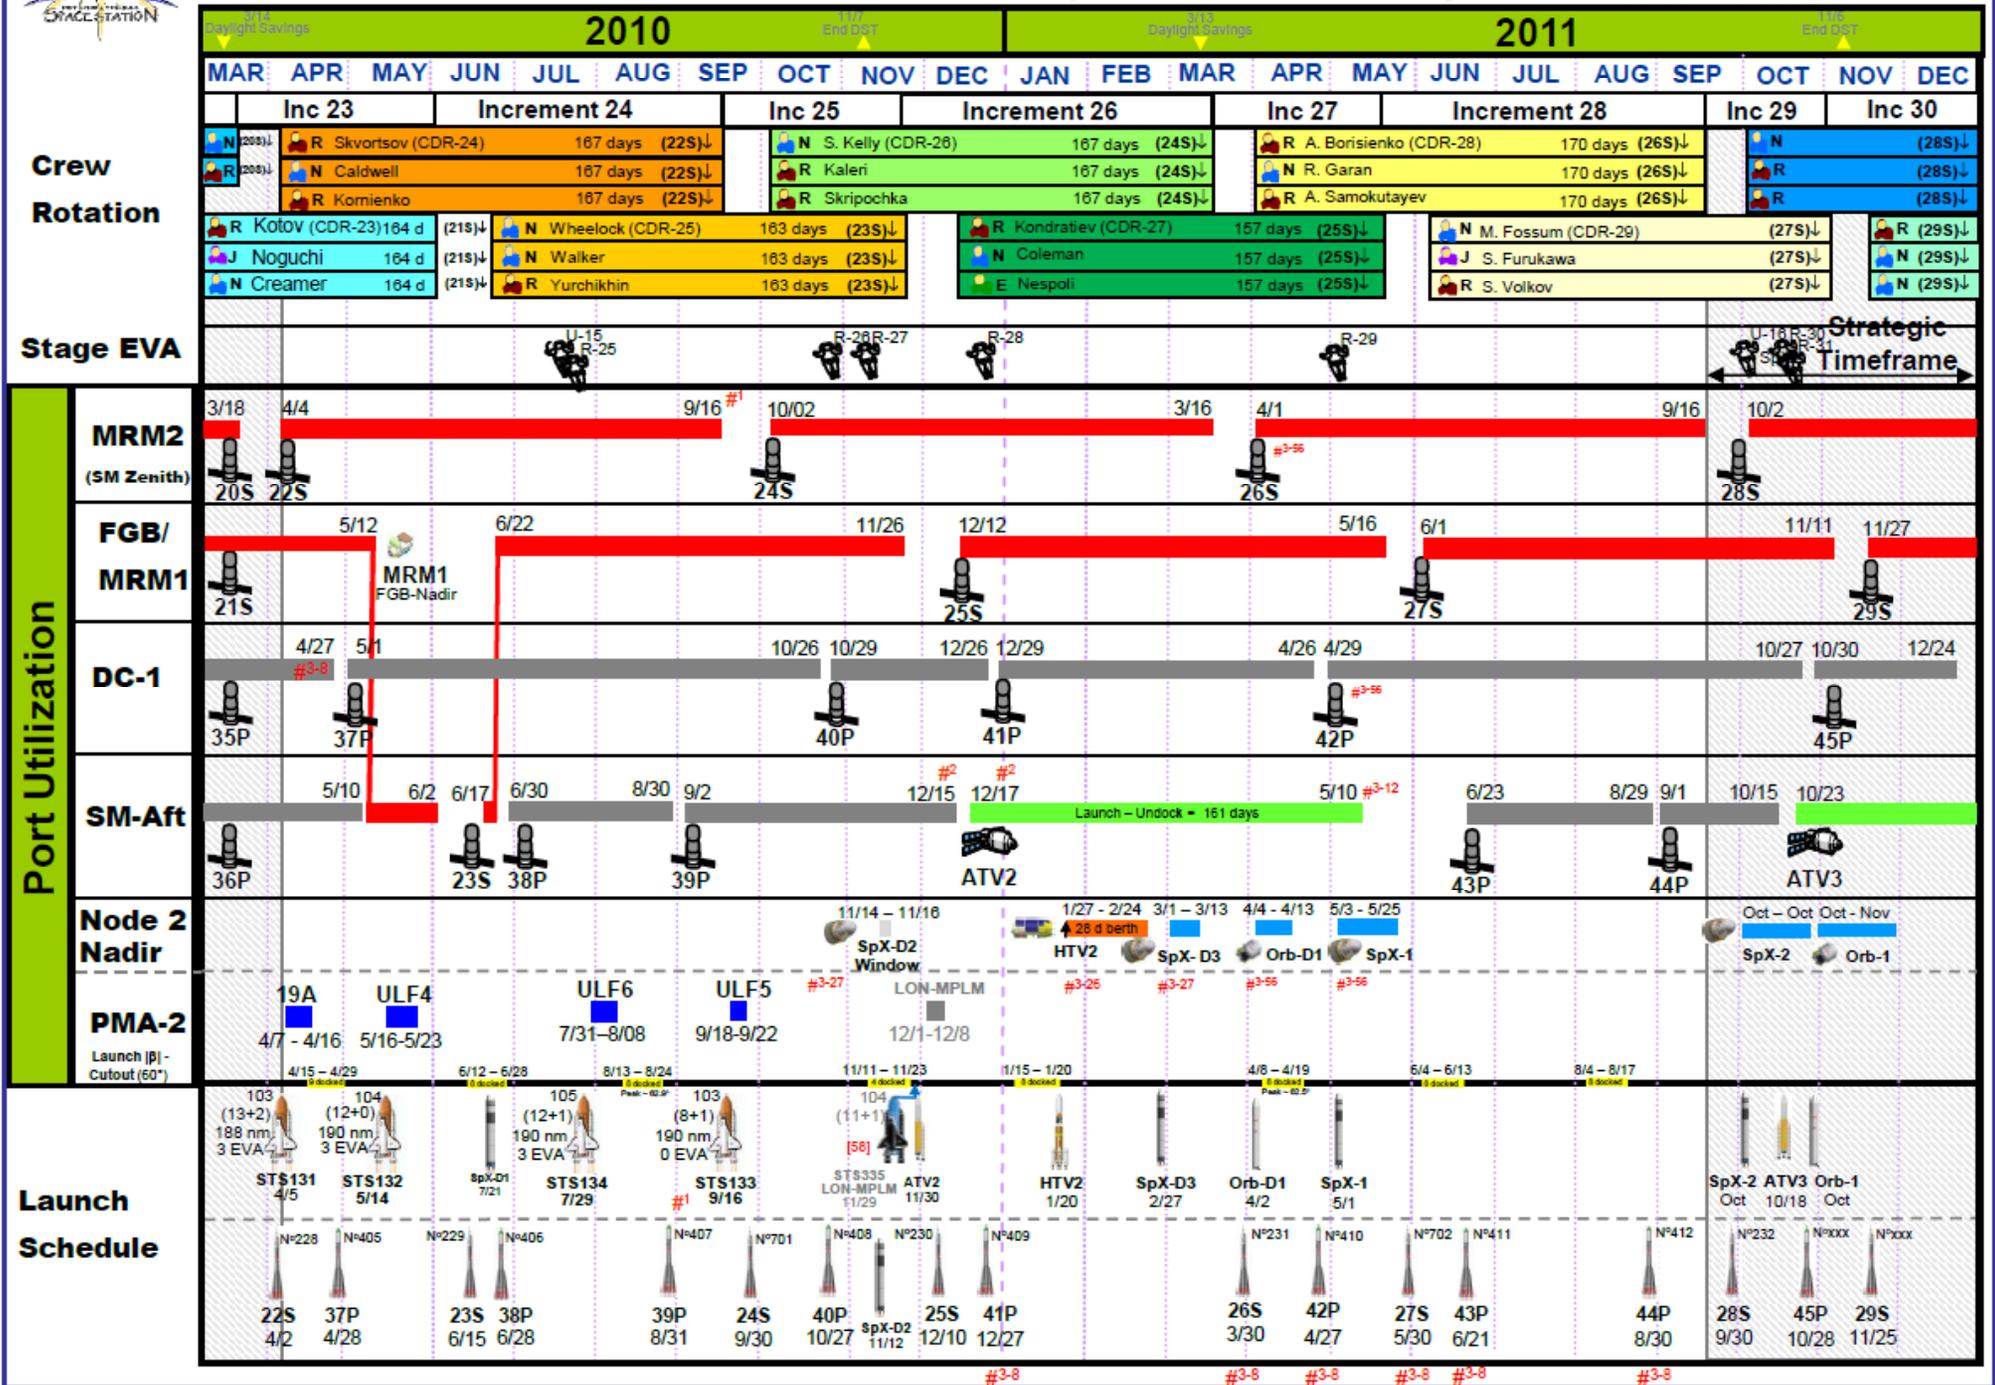

ATV

Upmass

- Internal

Powered: None

Late Load

- » Up to 28 bags (not CTBE) of late access

Racks

- » Up to 8 passive racks

- External

None

- On Dock

Cargo: L-14 weeks

Late Load: L-4 weeks


Downmass

- Internal

Disposal only

- External

None

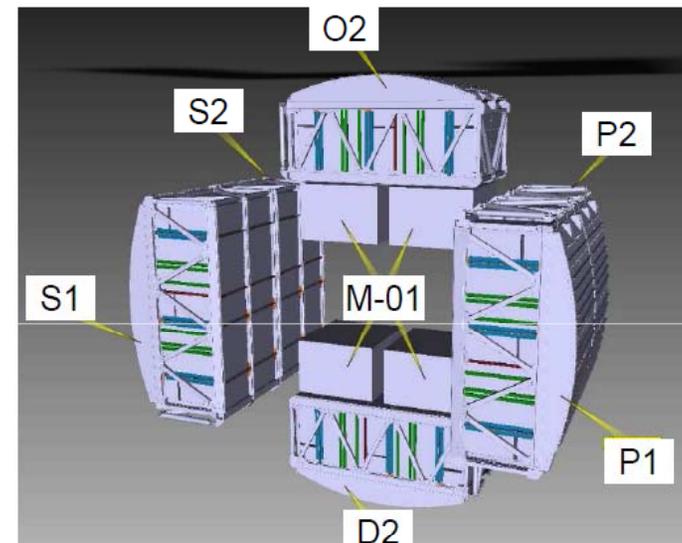

ATV-2 Racks with M-01 bags

HTV

Upmass

- Internal

Powered: None

Late Load

- » Maximum 3 CTBE (0.5 or 1.0 CTB), each <20 kg
- » Additional possible if negotiated in advance.

Racks

- » Up to 8 passive racks
- » Forward Bay: ISPR compatible
- » Aft Bay racks fixed: HTV Resupply Rack

- External

Exposed Pallet (on following chart)

- On Dock

Cargo: L-6 months

Late Load: L-6 weeks


Downmass

- Internal

Disposal only

- External

Disposal only

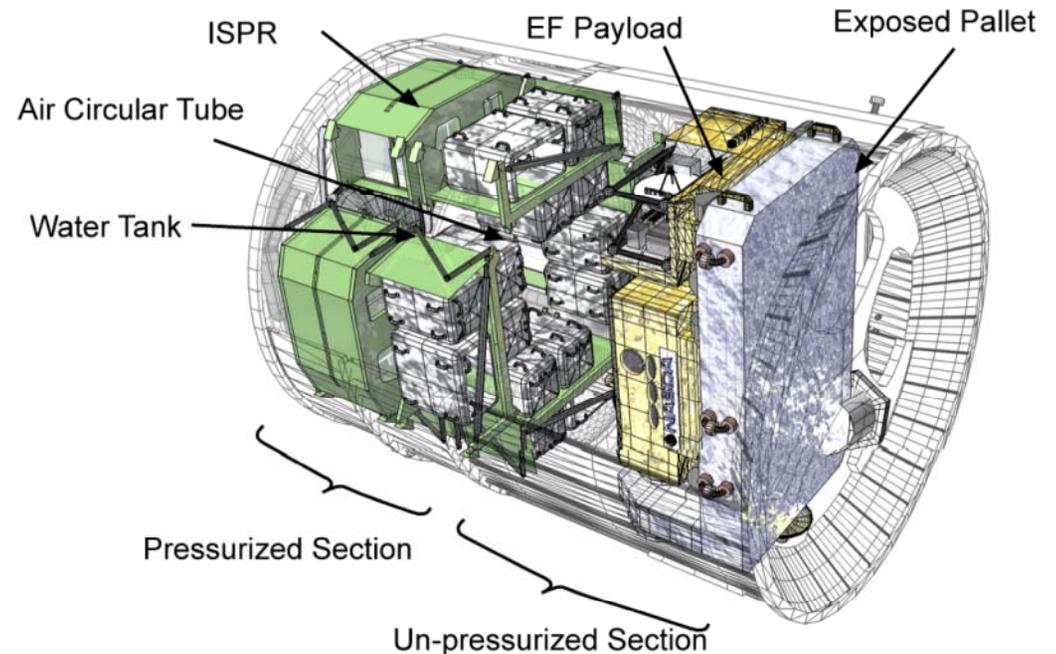

HTV External Pallet Configurations

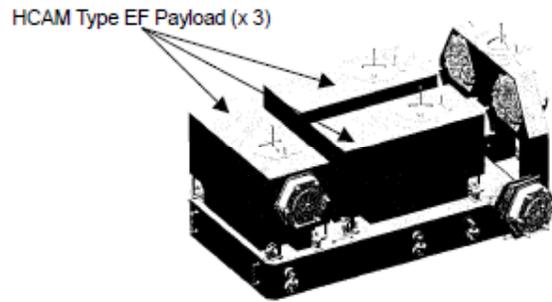


Fig. 3.3.2-1 Type I-a: HCAM Type EF Payload (x 3)

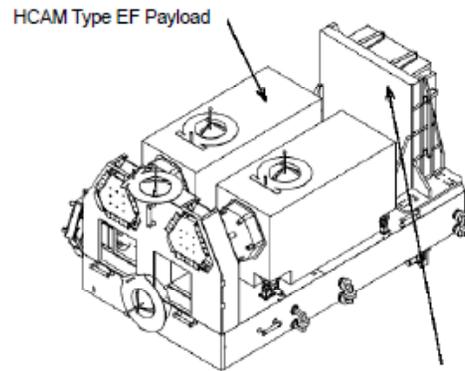


Fig. 3.3.2-4 Type I-c: HCAM Type EF Payload (x 2) and Battery Transportation Demonstration (x 1)

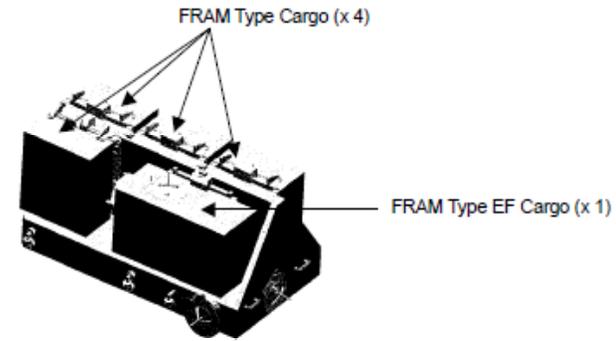


Fig. 3.3.2-6 Type III-b: FRAM Type EF Payload (X1) and FRAM Type Cargo (X4)

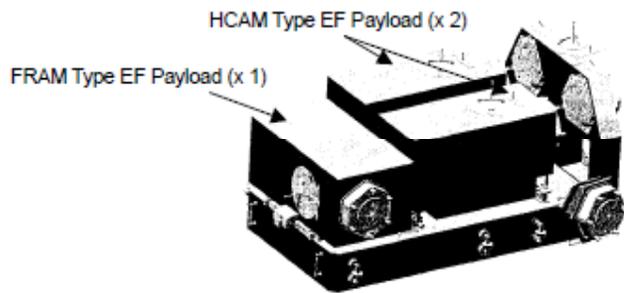


Fig. 3.3.2-2 Type I-b: HCAM Type EF Payload (x 2) and FRAM Type EF Payload (x 1)

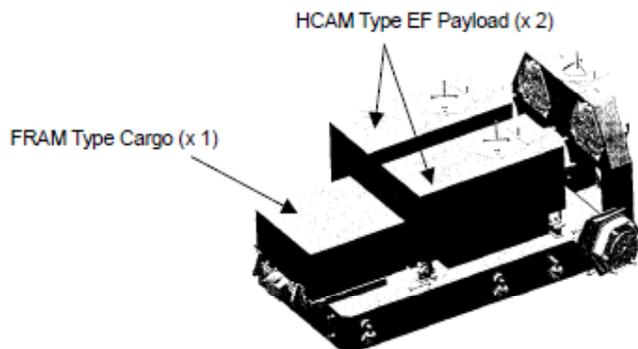


Fig. 3.3.2-3 Type I-b': HCAM Type EF Payload (x 2) and FRAM Type Cargo (x 1)

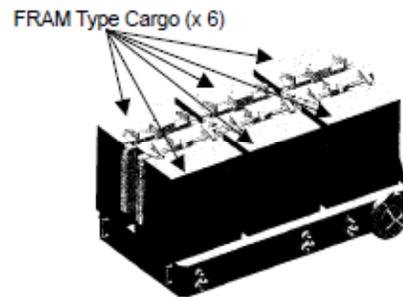


Fig. 3.3.2-5 Type III-a: FRAM Type Cargo (X6)

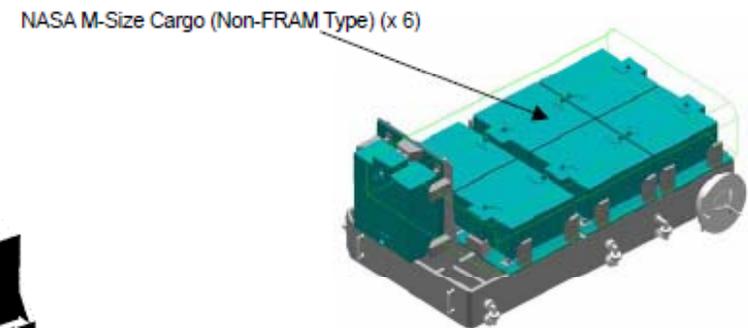


Fig. 3.3.2-7 Type III-c: Non-FRAM Type Cargo (X6)

Progress

Upmass

- Internal

Powered: Special allowance only

Late Load

Racks: None

Items up to 8-10 kg in vehicle containers

Larger items installed in special transport frames

- External

None

Downmass

- Internal

Disposal only

- External

None

Soyuz

Upmass

- Internal

Powered: Special allowance only

Late Load

Racks: None

Items up to 5 kg in vehicle
containers

Larger items installed in special
transport frames

- External

None

Downmass

- Internal

Items up to 5 kg in container
under crew seat

Special container available for
larger items if only two crew on
return

- External

None

Dragon

Upmass

- Internal

Powered: Double MLE

Late Load: T-12 hrs for powered MLE; TBD days for nominal

Racks (SpaceX-designed)

» ~3300 kg mass

- External

Trunk capability

Downmass

- Internal

Powered: Double MLE


~1700 kg return

Early destow at dock available

Fast boat return available

- External

Disposal only

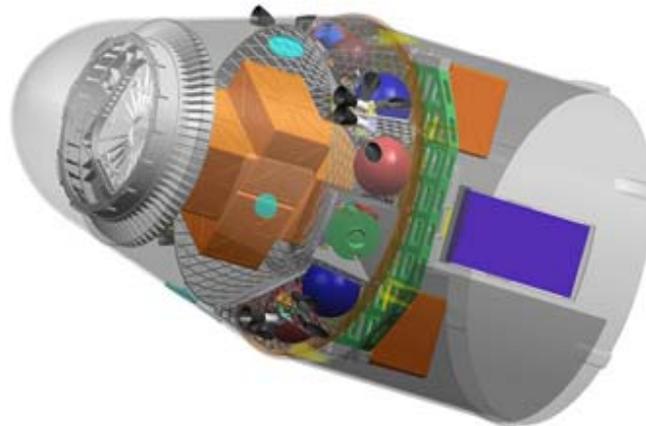

Cygnus

Upmass

- Internal

Powered: Double MLE

Late Load: TBD

Racks

- » 2000 kg mass (standard)
- » 2700 kg mass (expanded)

- External

None


Downmass

- Internal

Disposal only

- External

None

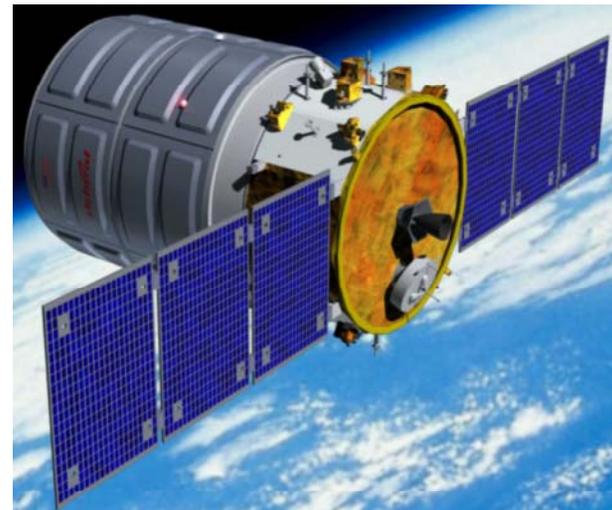

References

- ISS Program Scientist Toolbox - <http://iss-science.jsc.nasa.gov/index.cfm>
- ISS National Laboratory Office - http://www.nasa.gov/mission_pages/station/science/nlab/index.html
- Advanced Avionics Development Office - <http://iss-www.jsc.nasa.gov/nwo/avionics/aado/home/web/>
- Attached Payload Interface Requirements Document, SSP 57003
- [Common Interface Requirements Document](#), SSP 50835
- [ATV-2 Cargo Summary](#) (24 Sep 2009)
- [HTV Cargo Accommodation Handbook](#), JFX-99102
- [Requirements for International Partner Cargo Transported On Russian Progress and Soyuz Vehicles](#), П32928-103
- SpaceX Introduction For Payloads (OZ3, Jan 2010)
- [Cygnus Fact Sheet](#) (Orbital, 2009)

Backup

Science Facilities Overview

Science Facilities On Orbit



*Expedition 2 crewmember
Susan Helms activating the
HRF 1 rack*

2 Human Research Facility (HRF) Racks -
Biomedical investigations, including ultrasound, body mass measurement, metabolic gas analysis, pulmonary monitoring, ambulatory blood pressure measurement, Holter monitor, and experiment unique hardware



*Expedition 12 crewmember
Bill McArthur activating the
SLAMMD in the HRF 2 rack*

- **Microgravity Sciences Glovebox (MSG)**
Principally materials and fluid physics experiments to date



*Expedition 13 crewmember Jeff Williams performing the
PFMI experiment in the Microgravity Science Glovebox*

Science Facilities On Orbit




Expedition 3 crewmember Frank Culbertson conducting cell culture experiment in CBOSS in EXPRESS Rack 4

- 7 Multi-User (**EXPRESS**) Racks - Middeck locker scale instruments in various research disciplines such as biotechnology and plant research



Expedition 14 crewmember Mike Lopez-Alegria conducting TROPi plant growth experiment in EMCS in EXPRESS Rack 3

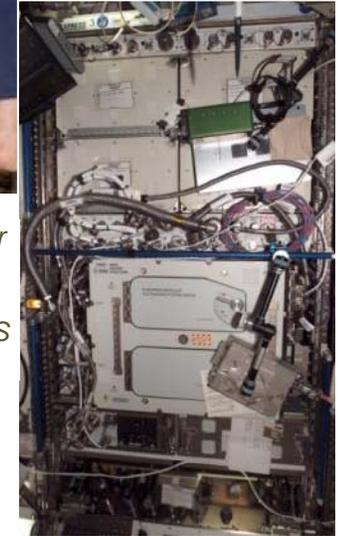

- **2 Minus Eighty-degree Laboratory Freezer for ISS (MELFI)** - Provides thermal conditioning at +4°C, -26°C and -80°C



Expedition 14 crewmember Thomas Reiter removing frozen samples from MELFI



MELFI 3

Science Facilities On Orbit



SpaceDRUMS



WORF



CIR

- **Space Dynamically Responding Ultrasound Matrix System (SpaceDRUMS)**
- **Window Observation Research Facility (WORF) (2009)**
 - Facility to support visual and multispectral remote sensing using Lab Optical Window
- **Combustion Integrated Rack (CIR) (2008)**
 - Facility dedicated to research in combustion science

Science Facilities On Orbit

- **Materials Science Research Rack (MSRR)** (2009)
 - Facility to support ESA Microgravity Science Lab furnace
- **Fluids Integrated Rack (FIR)** (2009)
 - Facility dedicated to fluid physics research, with Light Microscope Module
- **Muscle Atrophy Research Exercise System (MARES)** (2009)
 - Facility for musculoskeletal, biomechanical, neuromuscular and neurological physiology measurements



MSRR




FIR




MARES

ELC1 Configuration

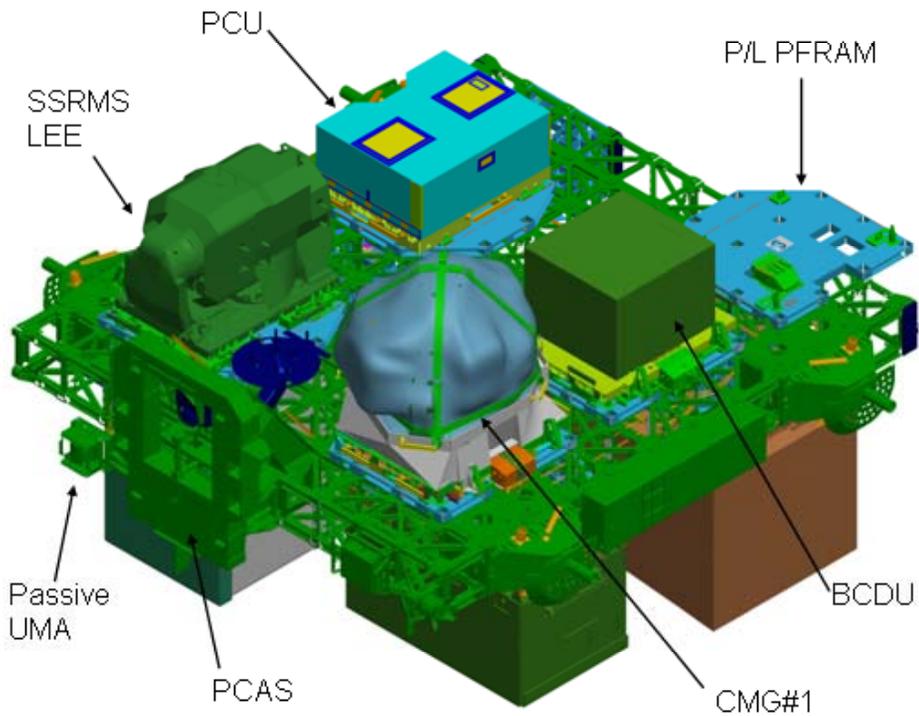


ELC1 Top Side

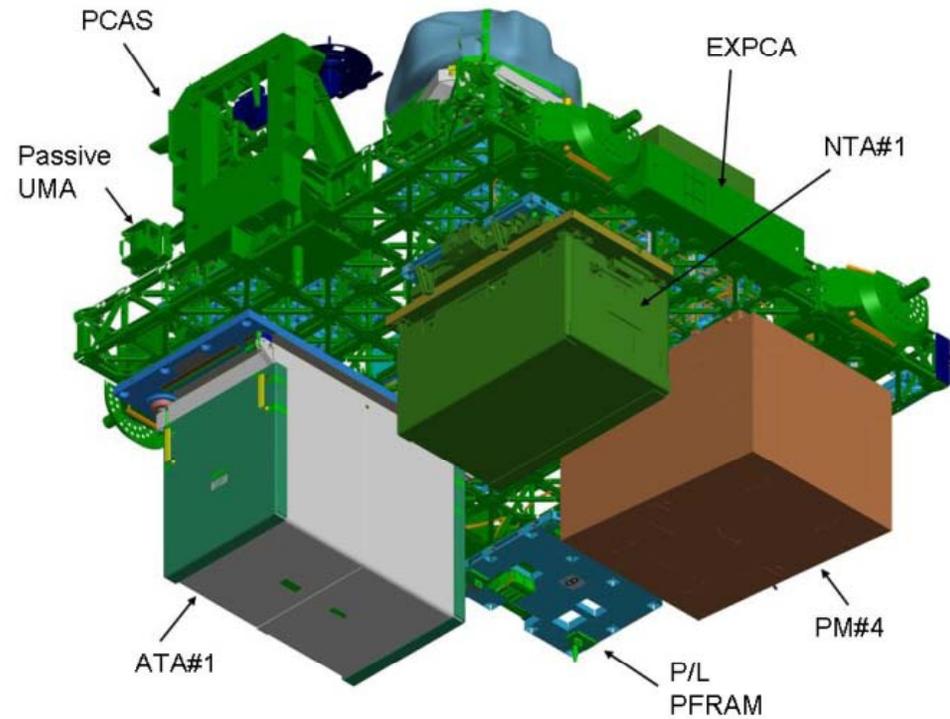


ELC1 Keel Side

ELC2 Configuration

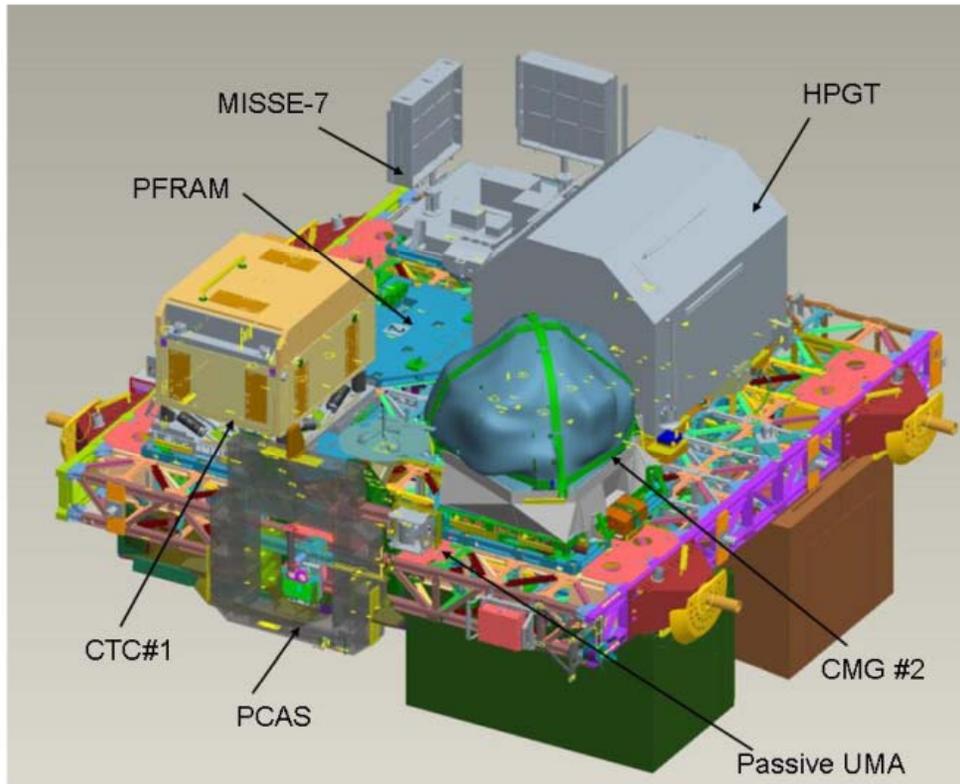


ELC2 Top Side

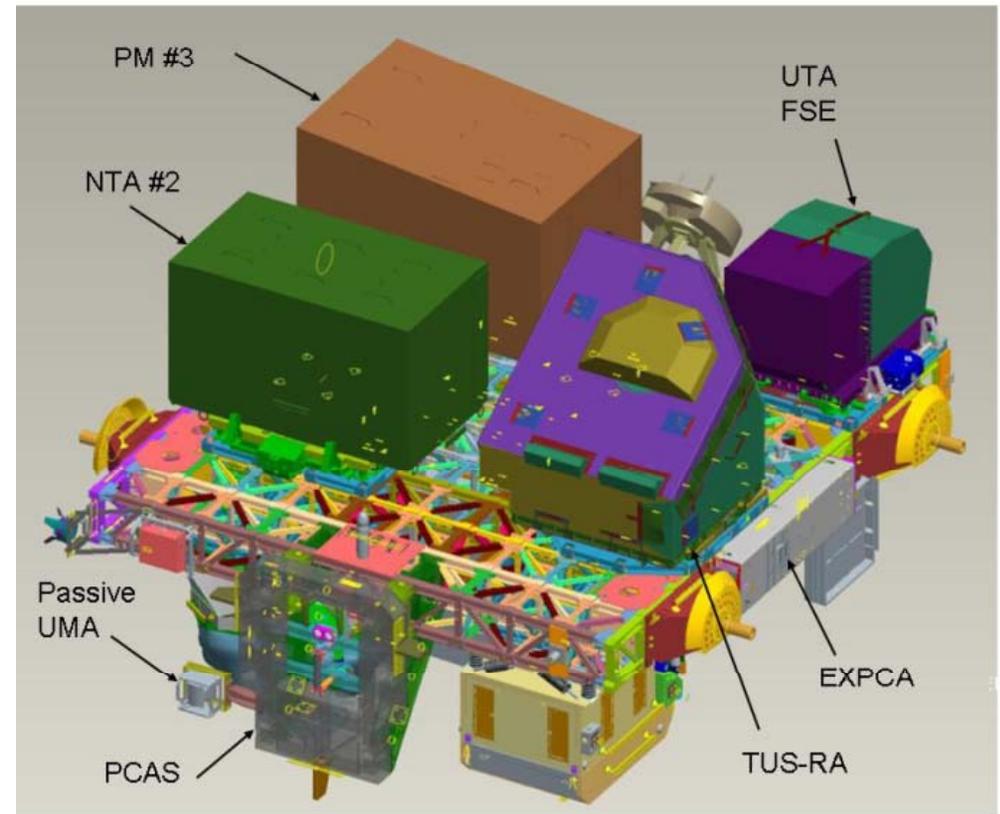


ELC2 Keel Side

ELC3 Configuration

Top Side


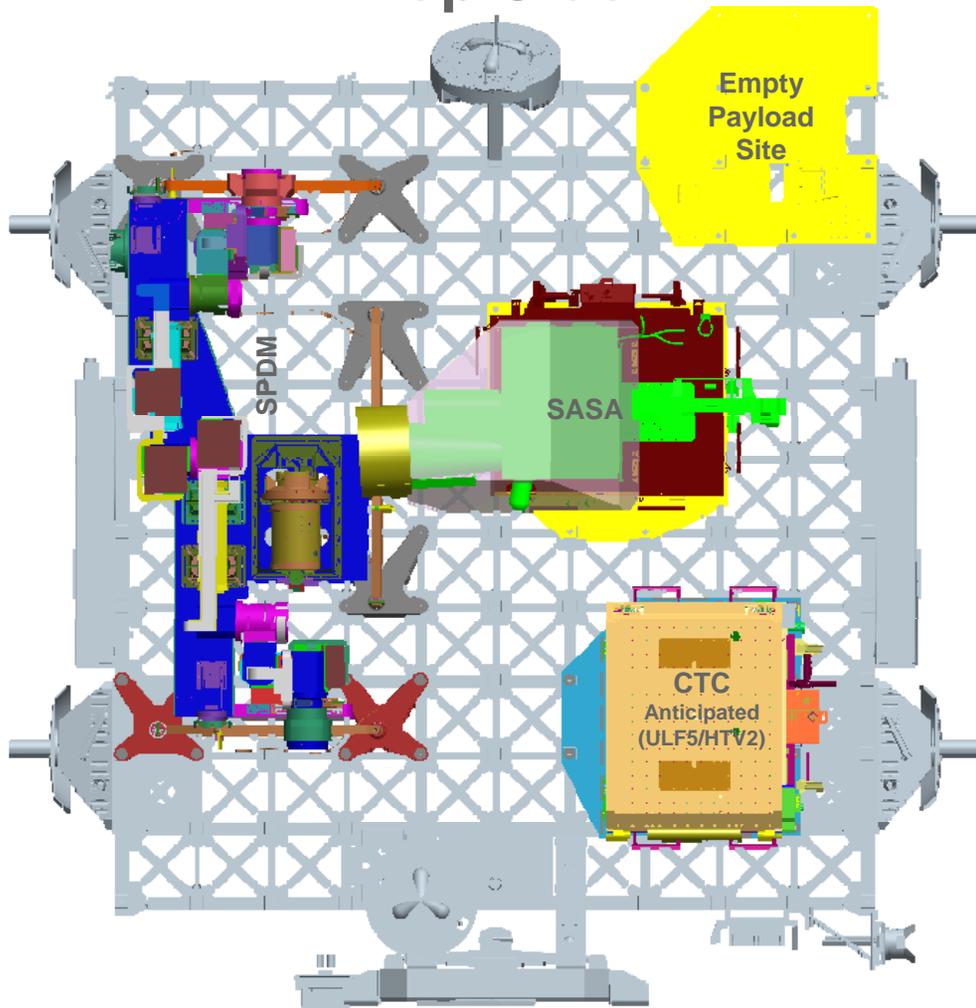


Keel Side

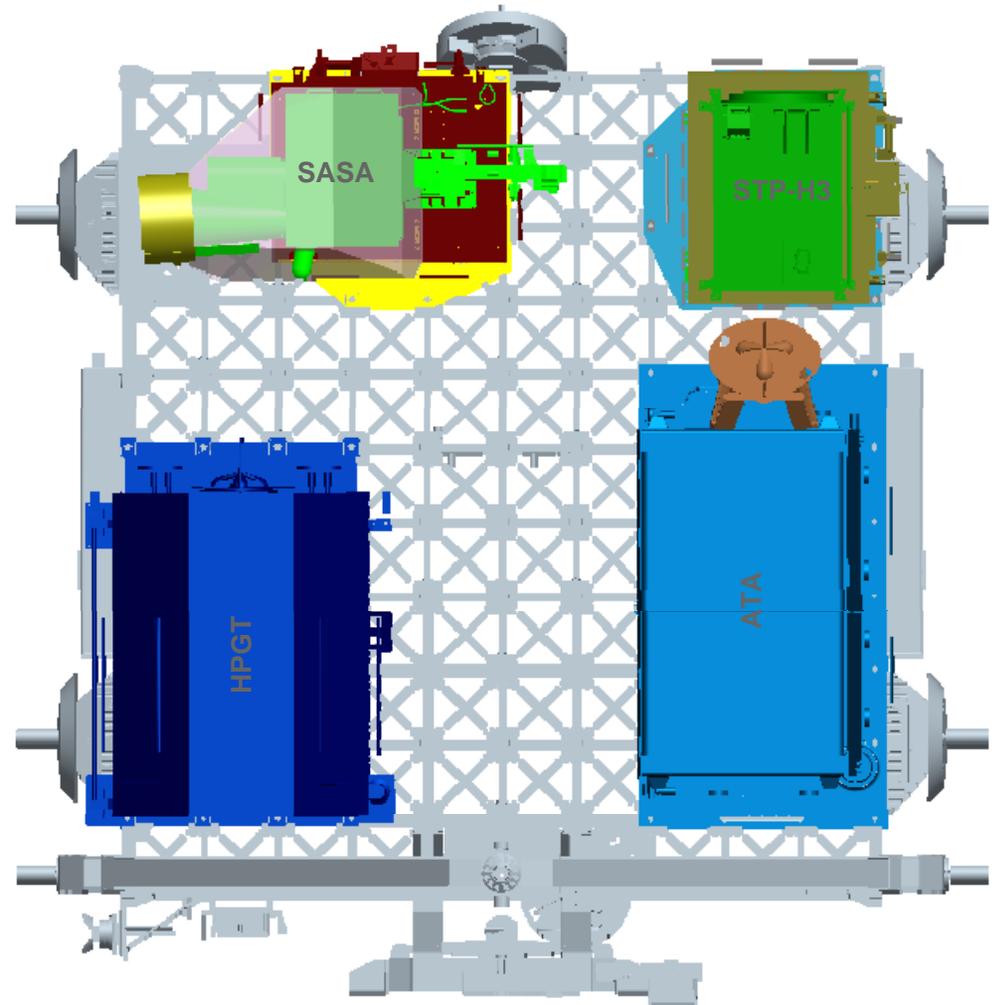


ELC4 Configuration


Top Side

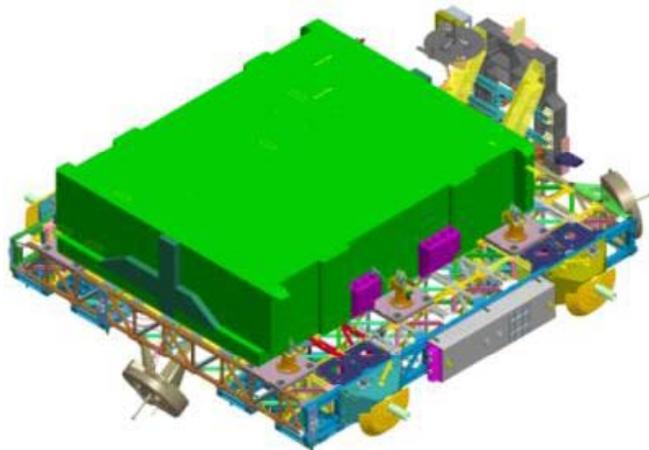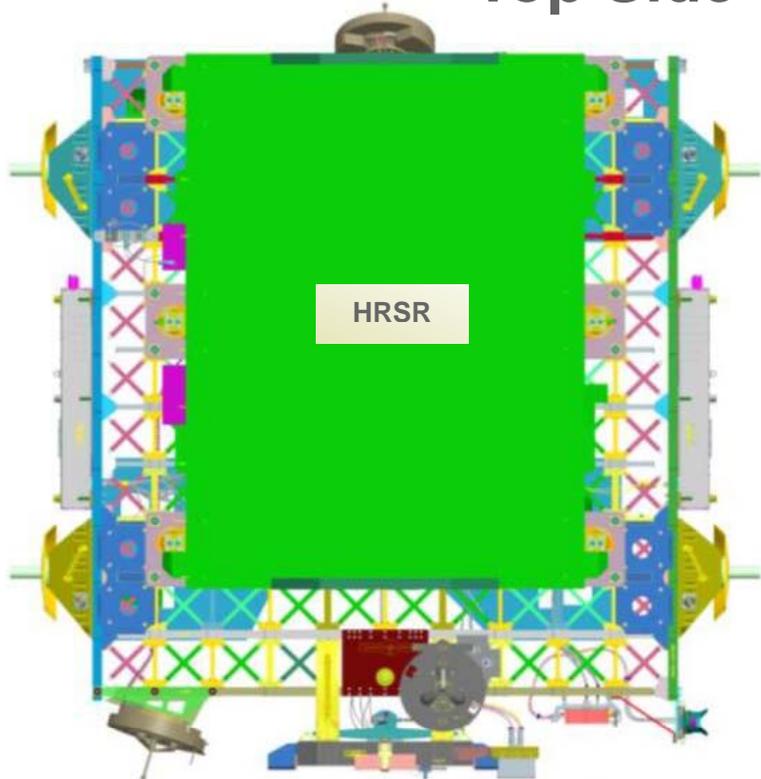

Keel Side

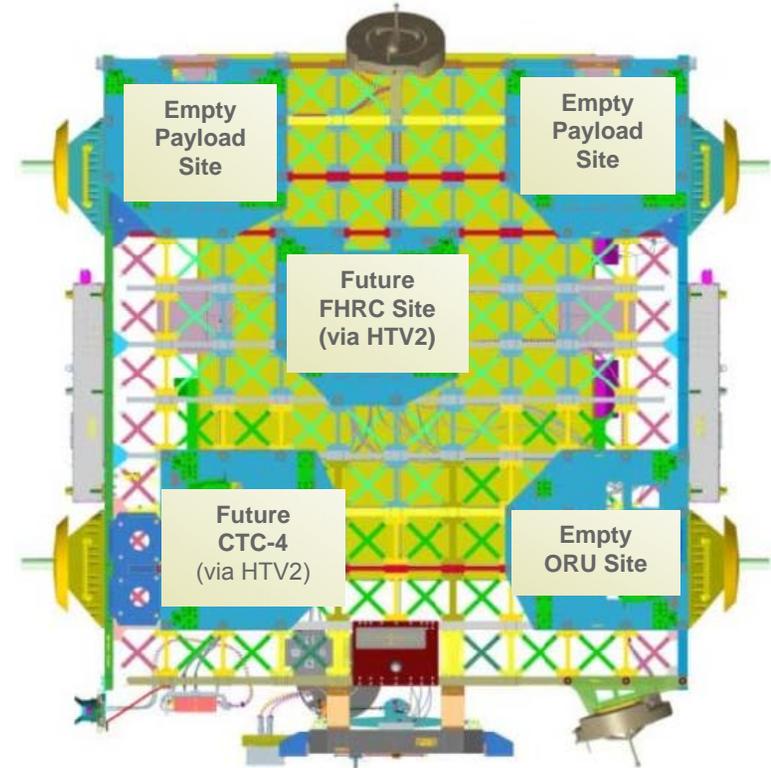

ISS Payload Integration Process

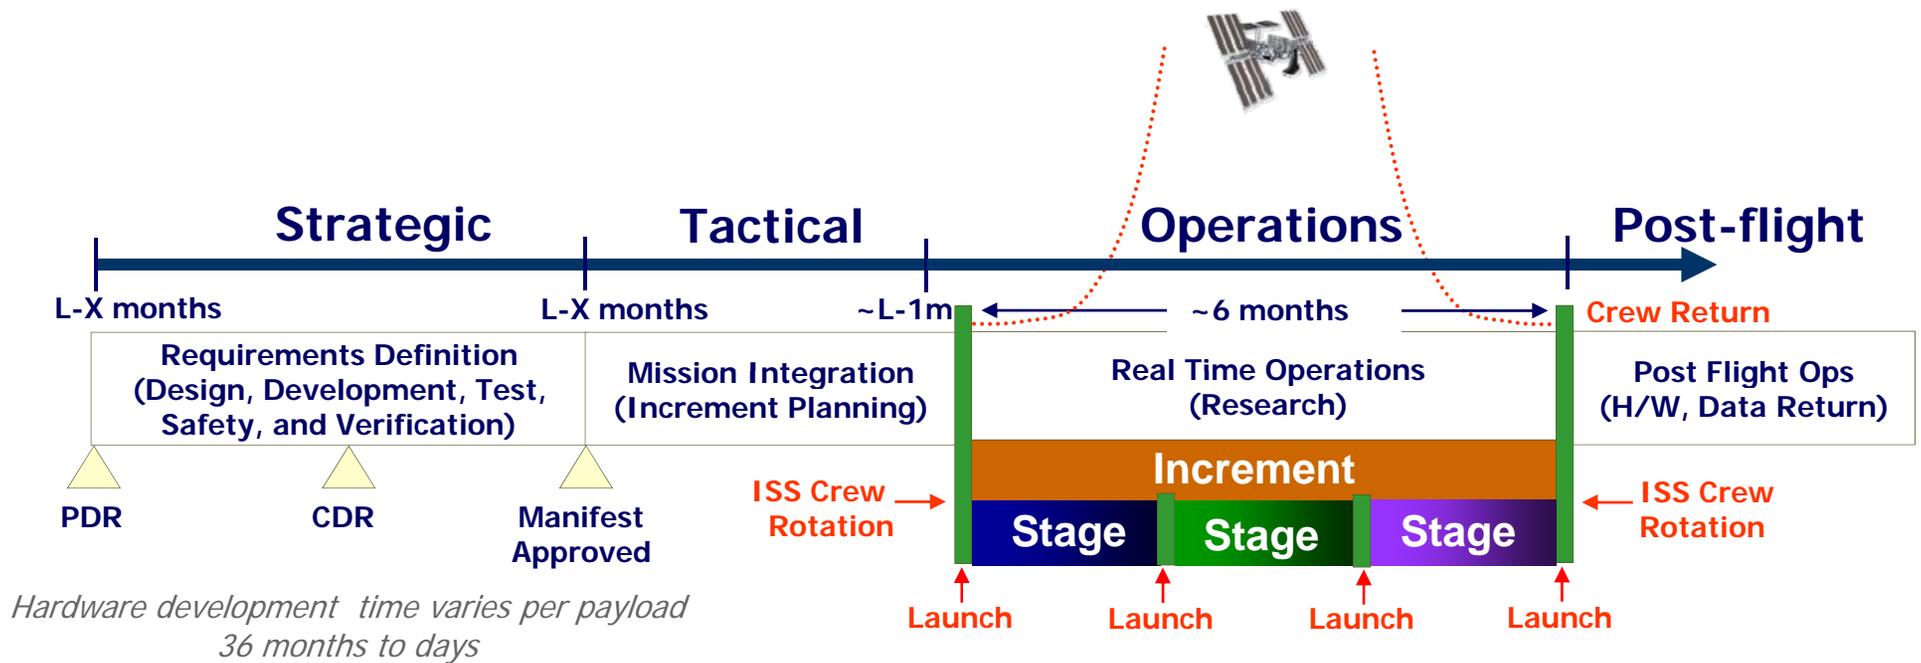

ISS Payload Control Centers



Payload Operations Center (POIC) - Huntsville

POIC: Responsible for execution of on-orbit NASA research



Mission Control Center—Houston

MCC-H: Responsible for flight command and control of overall vehicle




Mission Control Center—Moscow

MCC-M: Responsible for flight command and control of Russian segment.


Payload Ops Integration Center Interfaces

MCC-H, 4 IP Control Centers, 4 Telescience Support Centers, 49 Telescience Resource Kit (TReK) clients

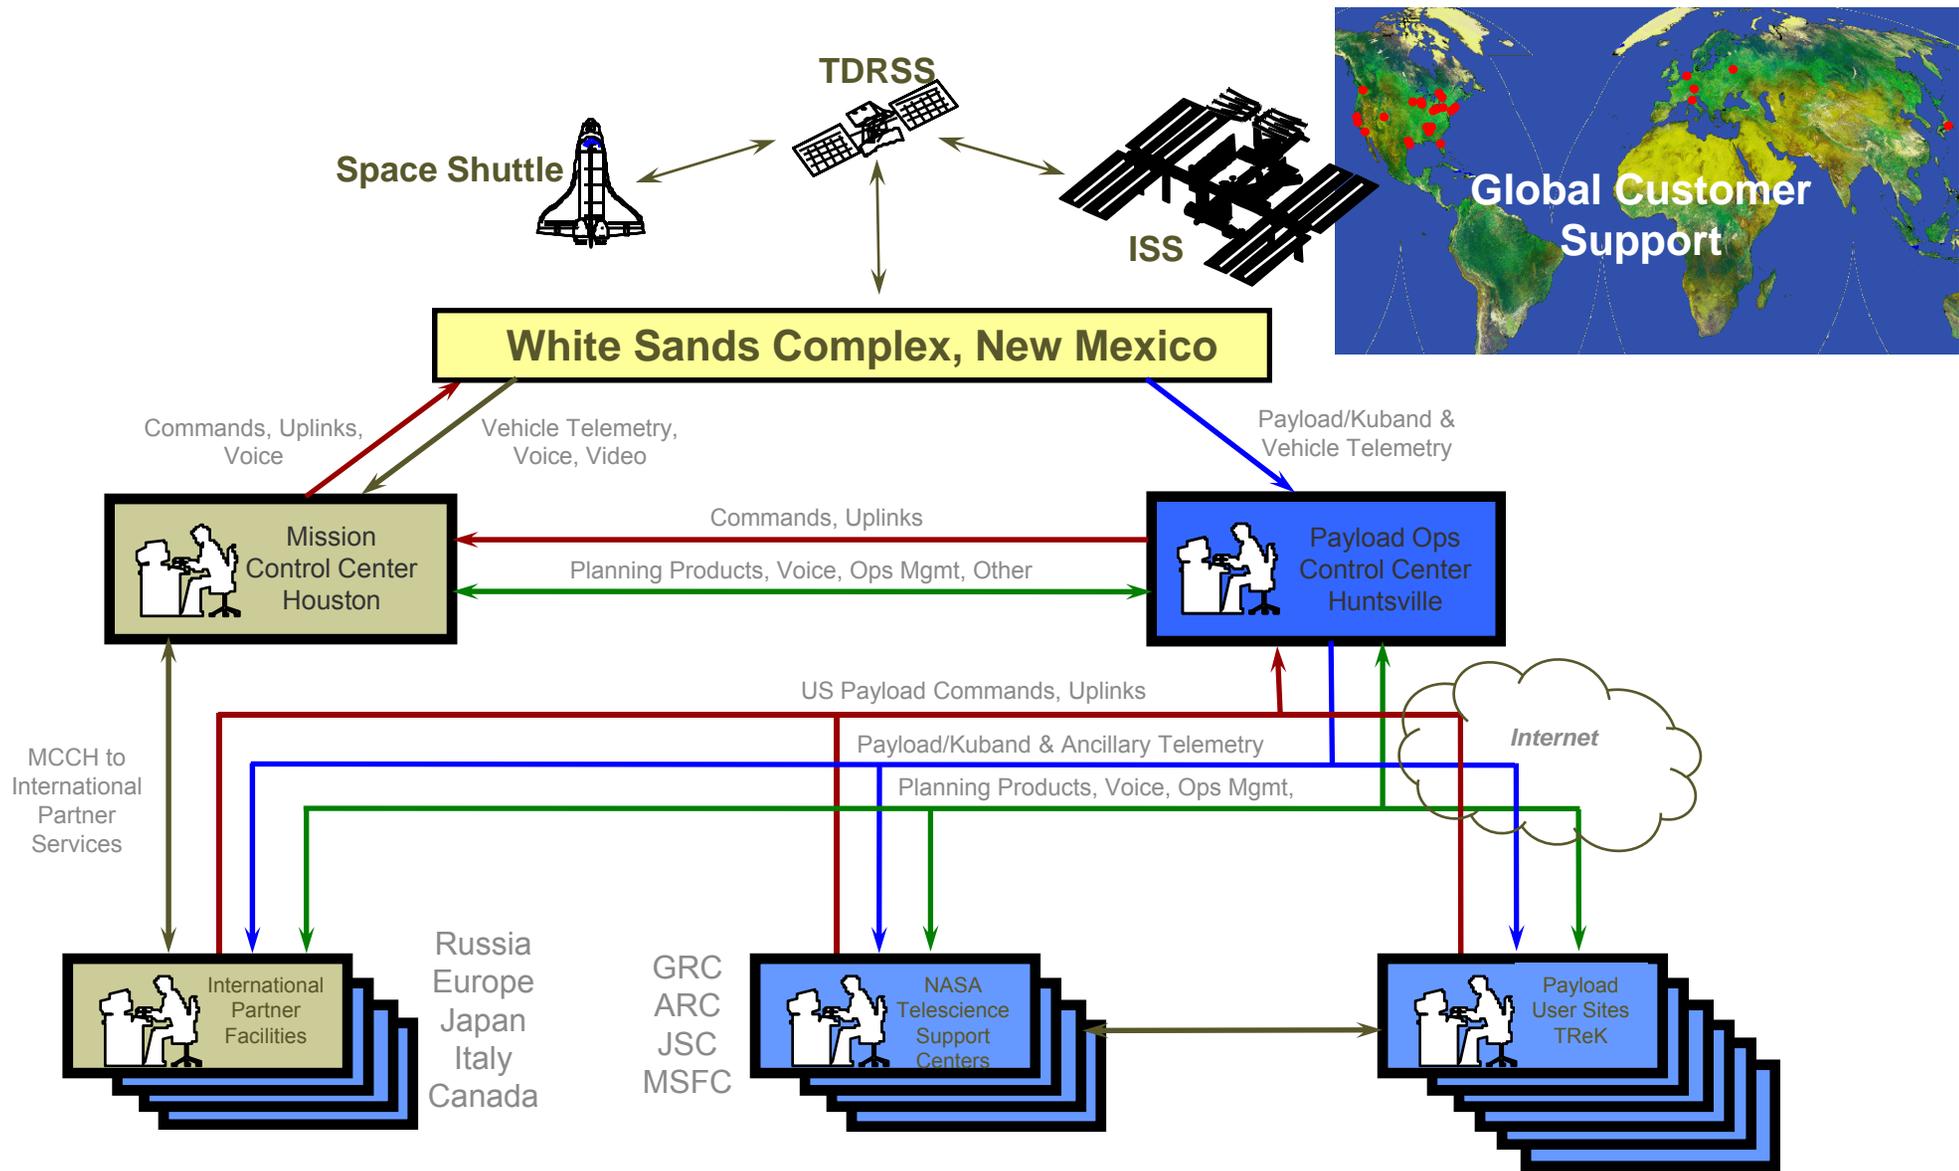

ISS Transition From Assembly to Utilization

Cumulative ISS Utilization Crewtime by All Partners

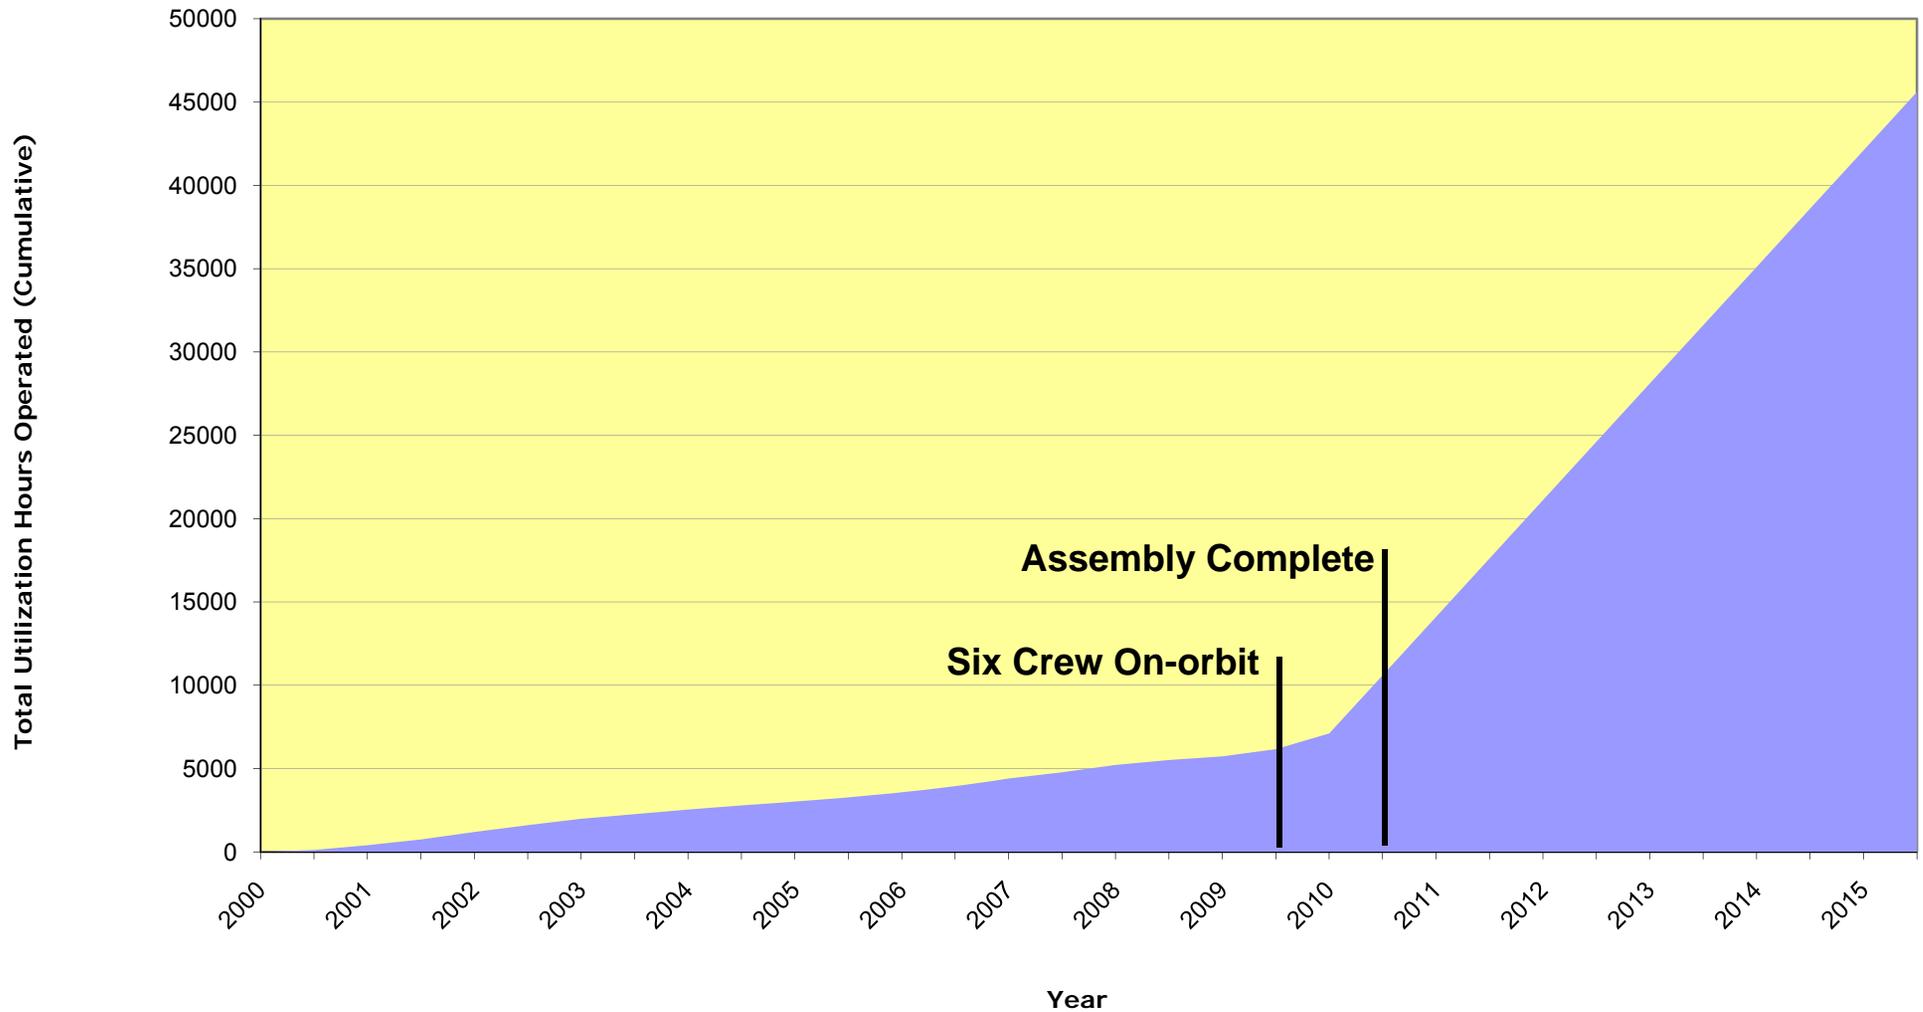

USOS RESEARCH CREW TIME

11 June 2010 (Data through 31 May 2010)



Average Weekly Actuals Provided as Compared to Minimum Requirements, Subscriptions, and Allocations

[POC: Rod Jones/OZ]

Legend

- Generic Groundrules, Requirements & Constraints (GGR&C) Minimum Requirement
- L-12 Month Increment Definition and Requirements Document Subscription (or Requirement)
- L-12 Month Increment Definition and Requirements Document (IDRD) Allocation
- L-1 Month Most Recent to Launch On-Orbit Operations Summary (OOS) (or most-current-to-launch IDRD until final pre-flight OOS release)
- Actuals Provided -- includes all Scheduled, Task-List, and Voluntary Science (IMC), and utilization during joint docked operations
- Plus n# Hours Per Week Average Reserve Crewtime (from Annex 5 PTP or MPCB Approval)

Status: **GREEN** ↑
Based on upswing in Increments 23 & 24 crewtime actuals against GGR&C; last month ↓

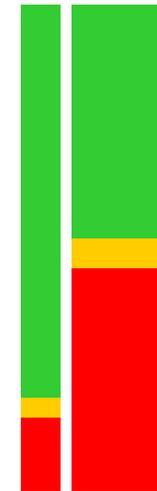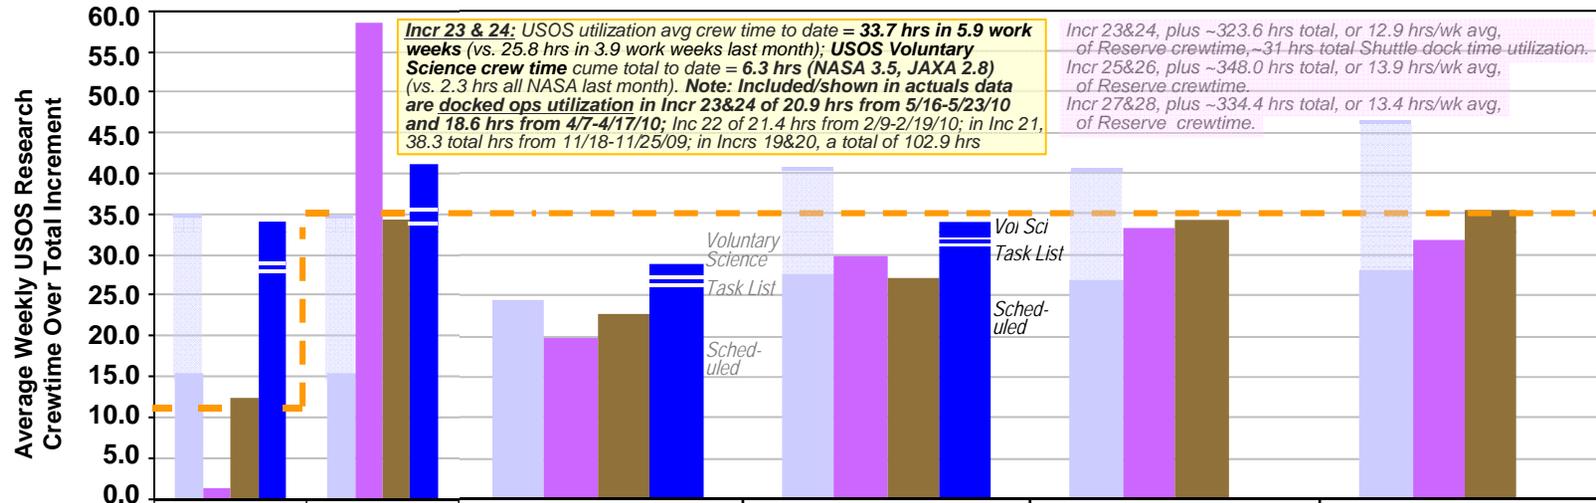

	Av wkly	Total	Av wkly	Total	Avg weekly	Total	Avg weekly	To Date	Total	Avg weekly	Total	Avg weekly	Total		
GGR&C (Min Req)	11.3	101.7	35.0	595.0	35.0	875.0	35.0	206.9	875.0	35.0	875.0	35.0	875.0		
L-12 IDRD Subscription	15.3	137.8	15.3	260.2	24.4	610.3	27.7 ^b	163.4	693.1 ^b	26.8 ^d	671.0 ^d	31.8 ^f	795.9 ^f		
L-12 IDRD Allocation	1.2	10.4	58.5	995.0	19.7	492.0	29.8 ^b	175.8	744.0 ^b	33.3 ^d	833.4 ^d	35.6 ^g	889.0 ^g		
L-1 OOS (or IDRD) Alloc	12.4	111.9	34.4	584.0	22.7	567.8	27.0 ^c	225.0	675.5 ^c	34.2 ^e	855.0 ^e	--	--		
Actuals* (to date)	34.2	123.0	41.2	597.6	28.9	548.4	34.0 ^a	200.6 ^a	200.6 ^a	--	--	--	--		
Int'l Partner Sub-Allocations and Actuals Breakdowns	IP L-1 Percent Fin		IP L-1 Percent Fin		IP L-1 hrs Percent Final		IP L-1 hrs To Date Percent		IP L-3 hrs Percent		L-12 allocation data as per Planning Authorization Letter for Incrs 27 & 28, Attachment A, April 2010				
	N	74.3	66.3%	81.4	N	416.4	67.3%	402.0	N	478.6	141.3	70.5%	NASA	675.5	79.0%
	E	9.6	10.7%	13.2	E	44.8	12.2%	66.9	E	74.9	20.2	10.0%	ESA	71.0	8.3%
	J	22.0	17.9%	22.1	J	77.9	16.4%	89.8	J	109.5	35.5	17.7%	JAXA	91.5	10.7%
	C	6.0	5.1%	6.3	C	28.4	4.4%	24.2	C	12.5	3.6	1.8%	CSA	17.1	2.0%

^aIncs 23 & 24 Actuals to date in 5.9 work weeks

^bPer Inc 23 & 24 Research Plan, Baselined 7/29/09

^cPer Inc 23 & 24 Final Pre-Flight OOS, 2/10

^dPer Inc 25 & 26 Research Plan, Baselined 11/09

^eInc 25 & 26 Incr Defn and Reqs Doc, baselined 3/10

^fPer Inc 27 & 28 Research Plan, Baselined 3/31/10

^gPer Inc 27 & 28 Planning Authorization Letter, 4/10

ISS Research Accommodations Status

11 June 2010 (Data through 31 May 2010)

[POC: Rod Jones/OZ]

Status: **GREEN** based on current and next Increments' overall outlook; last month



INVESTIGATIONS TALLY DETAIL

Expeditions 0 thru 22 (history)
 272 USOS New Investigations
 182 NASA, 90 Int'l Partner
 26 Nat'l Lab, 152 Completed
 > 985 scientists

Expeditions 21 & 22 (final)
 93 USOS Total (29 New)
 46 NASA, 47 Int'l Partner
 15 Nat'l Lab, 16 Completed
 > 391 scientists

Expeditions 23 & 24 (to date)
 133 USOS Total (53 New)
 73 NASA, 60 Int'l Partner
 22 Nat'l Lab, 9 Completed
 > 431 scientists

Expeditions 25 & 26 (planned)
 117 USOS Total (30 New)
 68 NASA, 49 Int'l Partner
 18 Nat'l Lab
 > 421 scientists

Expeditions 27 & 28 (planned)
 91 USOS Total (12 New)
 53 NASA, 38 Int'l Partner
 21 Nat'l Lab
 > 330 scientists

Totals for Expeditions 0 thru 28 (in graph at far right)
 367 USOS New Invs Op'd/Planned
 242 NASA, 124 Int'l Partner
 60 Nat'l Lab, 162 Completed
 > 1185 individual scientists



Number of Active (New and Continuing, Prime and Reserve) USOS Research Investigations Operated or Planned Per Increment, by Partner and Discipline Category

NL = number of National Laboratory active research investigations included in NASA experiment complement

Since April 2001, 9 years, 1 month of continuous USOS Research time to date

293 research investigations newly operated to date. In May 2010, new investigations BRIC-16-Cytoskeleton, BRIC-16-DNA, and BRIC-16-Regulation (all NASA); Express Payload Simulator (NASA); Ferulate (JAXA); Fish Scales (JAXA); IVGEN (NASA); Micro-2 (NASA); Myco-2 (JAXA), and NLP-Vaccine-9 (NASA) got operated for the first time. Also, 25 racks installed on-board and 7 externally to date

- Symbols**
 C = Canadian Space Agency (CSA)
 J = Japan Aerospace Exploration Agency (JAXA)
 E = European Space Agency (ESA)
 N = National Aeronautics and Space Admin (NASA)
- Discipline**
 = Biology and Biotechnology
 = Earth and Space Science
 = Educational Activities
 = Human Research
 = Physical and Materials Sciences
 = Technology Development

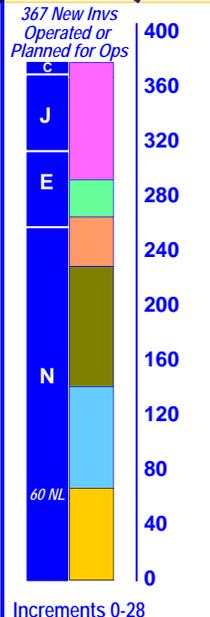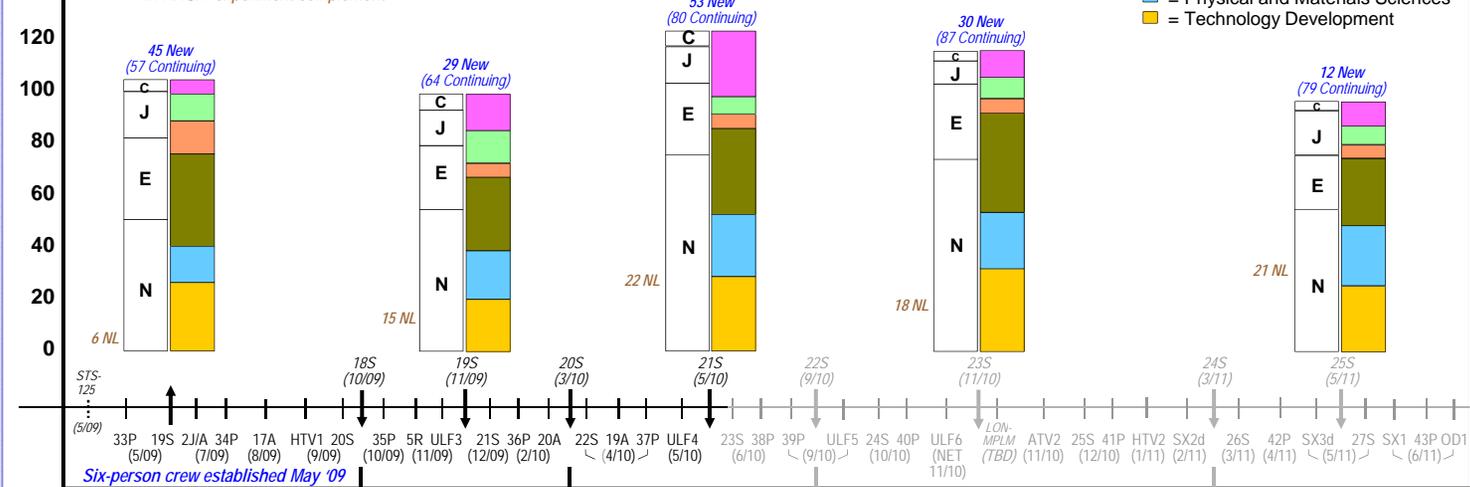

Key: IDRD = Incr Definition and Repts Doc.
 Incr = Increment
 Invs = Investigations
 IP = International Partner
 NL = National Laboratory
 OOS = On-orbit Operations Summary
 USOS = U.S. Operating Segment

	Incr 19 (final)	Incr 20 (final)	Incrs 21 & 22 (final)	Incrs 23 & 24 (to date)	Incrs 25 & 26 (in planning)	Incrs 27 & 28 (in planning)	Incrs 0 thru 24 Cumulative Actual Totals (thru May 31, 2010)
Research Crew Time Total (hrs) [†] (USOS / Russian)	123.0 / 30.3	597.6 / 221.3	548.4 / 246.3	200.6 / 163.4 (675.5 / 390.1) ^a	(855.0 / 639.4) ^f	(889.0 / 815.0) ^d	5546 / 2873 hrs
Avg Crew Time Per Work Week (hrs) [†] (USOS / Russian)	34.2 / 8.4	41.2 / 15.3	28.9 / 13.0	34.0 / 27.7 (27.0 / 15.6) ^a	(34.2 / 25.6) ^f	(35.6 / 32.6) ^d	12.5 / 7.0 hrs
Pressurized Research Rack Mass to Orbit (kg)	0	2521.4	0	2489.1 (2473.3) ^b	(1434.0) ^f	(tbd)	16262 kg
Pressurized Research Resupply* Upmass to Orbit (kg)	4.0	1092.8	895.9	1515.7 (2336.1) ^b	(4087.0) ^f	(900.0) ^d	9778 kg
Payload Utilization Downmass (kg)	0 [†]	761.5 ^e	476.3 ^e	960.3 (1063.3) ^g	(362.1) ^g	(500.0) ^d	6369 kg

[†]Includes Shuttle Middeck, Spacehab, Cargo Bay, Soyuz (#S), Progress (#P), Node 2 Harmony Module, Columbus Module, Japanese Experiment Module-Experiment Logistic Module-Pressurized Section (JEM-ELM-PS), Automated Transfer Vehicle (ATV1), H-II Transfer Vehicle (HTV), Mini-Research Module (MRM or 5R), SpaceX Development Test Flight (SXd), Launch-on-Need Multi-Purpose Logistics Module (LON-MPLM), Orbital Demo-1 (OD1)

Per Increment USOS Utilization Crewtime Hrs Partner Breakdown	IP		Actual		
	IP	Actual	IP	Actual	
NASA	402.0	NASA	367.5	NASA	141.3
ESA	86.4	ESA	66.9	ESA	20.2
JAXA	74.9	JAXA	89.8	JAXA	35.5
CSA	34.3	CSA	24.2	CSA	3.6

(XX) = most recent plan for entire Increment
^aNumbers include additional hours for utilization conducted during joint docked operations
^bIncrs 23 & 24 planned allocations as per Final Pre-Flight OOS, 2/10
^cIncrs 23 & 24 planned allocations as per Incr 23 & 24 Ops Review by Incr Payload Mgr, 12/8/09
^dIncrs 25 & 26 planned allocations as per Annex 5 Payload Tactical Plan, Rev A, 5/19/10 (Crewtime planning number does not include ULF6)
^eIncrs 27 & 28 Planning Authorization Letter, Attachment A, 4/10 (for upmass, prelim data)
^fIncrs 19-22 data under review for Post Incr Evaluation Report (PIER)
^gIncrs 21-26 planned downmass allocations as per Research Plan or Incr's most current IDRD

For more info on ISS Science & Technology Research, see: <http://iss.science.jsc.nasa.gov/index.cfm> (internal) or <http://www.nasa.gov/mission/pages/station/science/> (external)

